


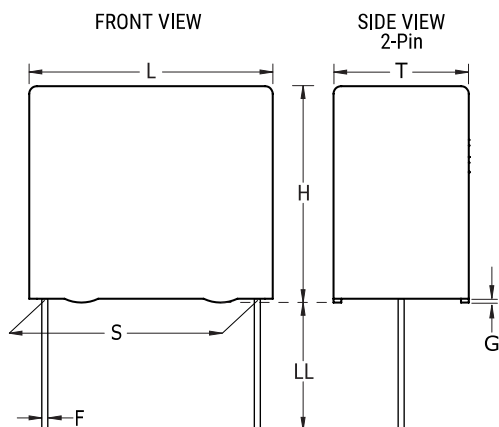

Click [here](#) for the 3D model.

General Information

Gruppe	PHE450/F450
Dielektrikum	Double Metallized Polypropylene
Typ	Radial
Eigenschaften	Pulse
RoHS	Yes
Terminierung	Tinned Wire
Draht	Wire Leads
AEC-Q200	No
Gewicht	10 g
Verschiedenes	The Rated Voltage Decreases 1.3%/C Between +85C And +105C. Rthha= 35 C/W (85C), 0.2 m/s.
Hinweise	Series Replaced by R76.

Dimensions

L	26mm -0.5mm
H	24.5mm -0.5mm
T	15.5mm -0.5mm
S	22.5mm +0.4/-0.4mm
LL	6mm -1mm
F	0.8mm +/-0.05mm
G	0.5mm NOM

Packaging Specifications

Verpackung	Bulk, Bag
Verpackungsmenge	176

Specifications

Kapazität	0.047 uF
Kapazitätstoleranz	5%
Gleichspannung	2500 VDC (85C), 1850 VDC (105C)
Wechselspannung	900 VAC
Temperaturbereich	-55/+105°C
Nenntemperatur	85°C
Verlustfaktor	0.03% 1kHz, 0.04% 10kHz, 0.15% 100kHz
Isolationswiderstand	100 GOhms
Max. dV/dt	1,800 V/us
Induktivität	6 nH

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.