

GLOBAL Trac Lighting Systems

Quality in Focus





GLOBAL Trac is the most flexible way of creating elegant and appropriate lighting

Nordic Aluminium is the global market leader in lighting track systems. The success is based on the reliability, durability and high quality of the products. Nordic Aluminium is also a world class supplier. A reliable partner means stability and ensures that the products continue to be available in years to come.



One-stop service

Nordic Aluminium is a comprehensive lighting systems provider, which means you can find everything you need from one place. There are three systems to choose from: GLOBAL Trac Pulse is for new adaptable control applications, GLOBAL Trac Pro is the professional's choice for three-phase systems and GLOBAL Trac Base is a compact one-circuit basic track. All you need to do is to choose the system that best meets your needs. In addition, Nordic Aluminium supplies a wide range of UL approved track systems.



Our R&D looks to the future

The focus of the Nordic Aluminium's R&D is on the needs of the customer. We use patented solutions and continue to develop new products. All products are designed by the company's R&D department, which ensures high quality throughout the product range. The R&D department also follows technical trends in the lighting business.



Quick and easy installation


Diverse installation options are part of the package. All installation options are quick and easy to implement. The latest trend includes snap-on brackets for the tracks. The connectors and other accessories are reliable, and the customer can trust that the installation goes nice and smoothly.



GLOBAL Trac product range

GLOBAL Trac Pro

- The most popular three-phase track in the world
- Circuits can be controlled individually, easy to mount
- Modular solution, easy to extend/adapt
- Suitable for department stores and shops, recessed mounting version also available

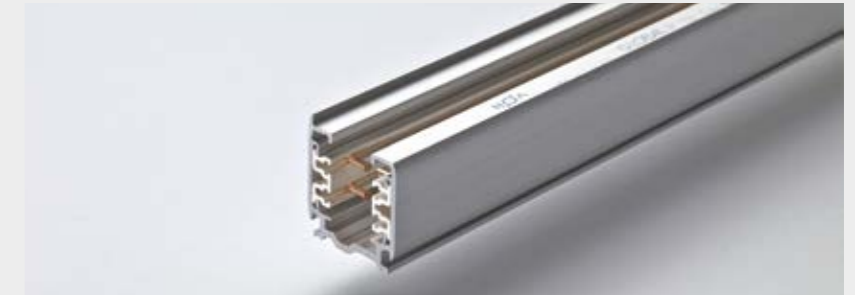

GLOBAL Trac Pulse

- A three-phase track for control systems
- Suitable for controlling diverse, adaptable lighting
- Can be used with all control systems, such as DALI, EIB, LON and 1-10V
- Suitable for areas that are challenging to illuminate and that require modern's control systems
- Fully FELV tested and approved



GLOBAL Trac Base

- A compact one-circuit track
- Small, elegant, compact
- Connectors can be fixed fast, "snap on" technic in covers
- Suitable for small business and exhibition structures, recessed mounting version also available



GLOBAL Trac suspension parts

- Diverse suspension options for each track system, respectively
- GLOBAL Trac Pro and GLOBAL Trac Pulse
- GLOBAL Trac Base
- Suspension examples



GLOBAL Trac adapters

- Three-circuit universal MULTI Adapters™
- Three-circuit adapters for the GLOBAL Trac Pulse system
- Three-circuit adapters for the GLOBAL Trac Pro system
- One-circuit adapters for the GLOBAL Trac Base system






GLOBAL Trac Pro

GLOBAL Trac Pro is the most sold three-circuit lighting track system in the world. It is the quality choice of professionals and lighting manufacturers. Long experience and 100% quality assurance ensure problem-free operation. Diverse installation options are part of the package. All options are quick and easy to implement and result in overall cost savings.



For various spaces

GLOBAL Trac Pro's high load capacity and circuit-specific control option can be used in many different spaces, including shops, department stores, public buildings, restaurants, airports and offices.

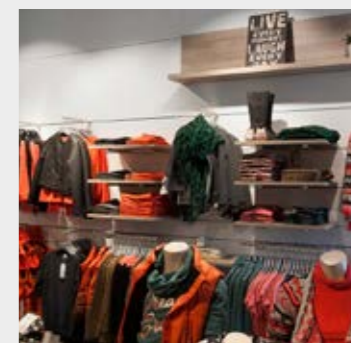

Also for suspended ceilings

There is a recessed version of GLOBAL Trac Pro for suspended ceilings, too. The standard colours are grey, white and black, as in all GLOBAL Trac Pro tracks.




Easy to extend

The modular structure of the system makes it easy to extend and adapt to various needs. Modular dimensions help designers fit the system into the appropriate space and also make on-site mounting easier. Reliable connectors ensure fast and easy installation.




GLOBAL Trac Pro


L1/L2/L3/neutral/ground 16 A/400 V. IP20.

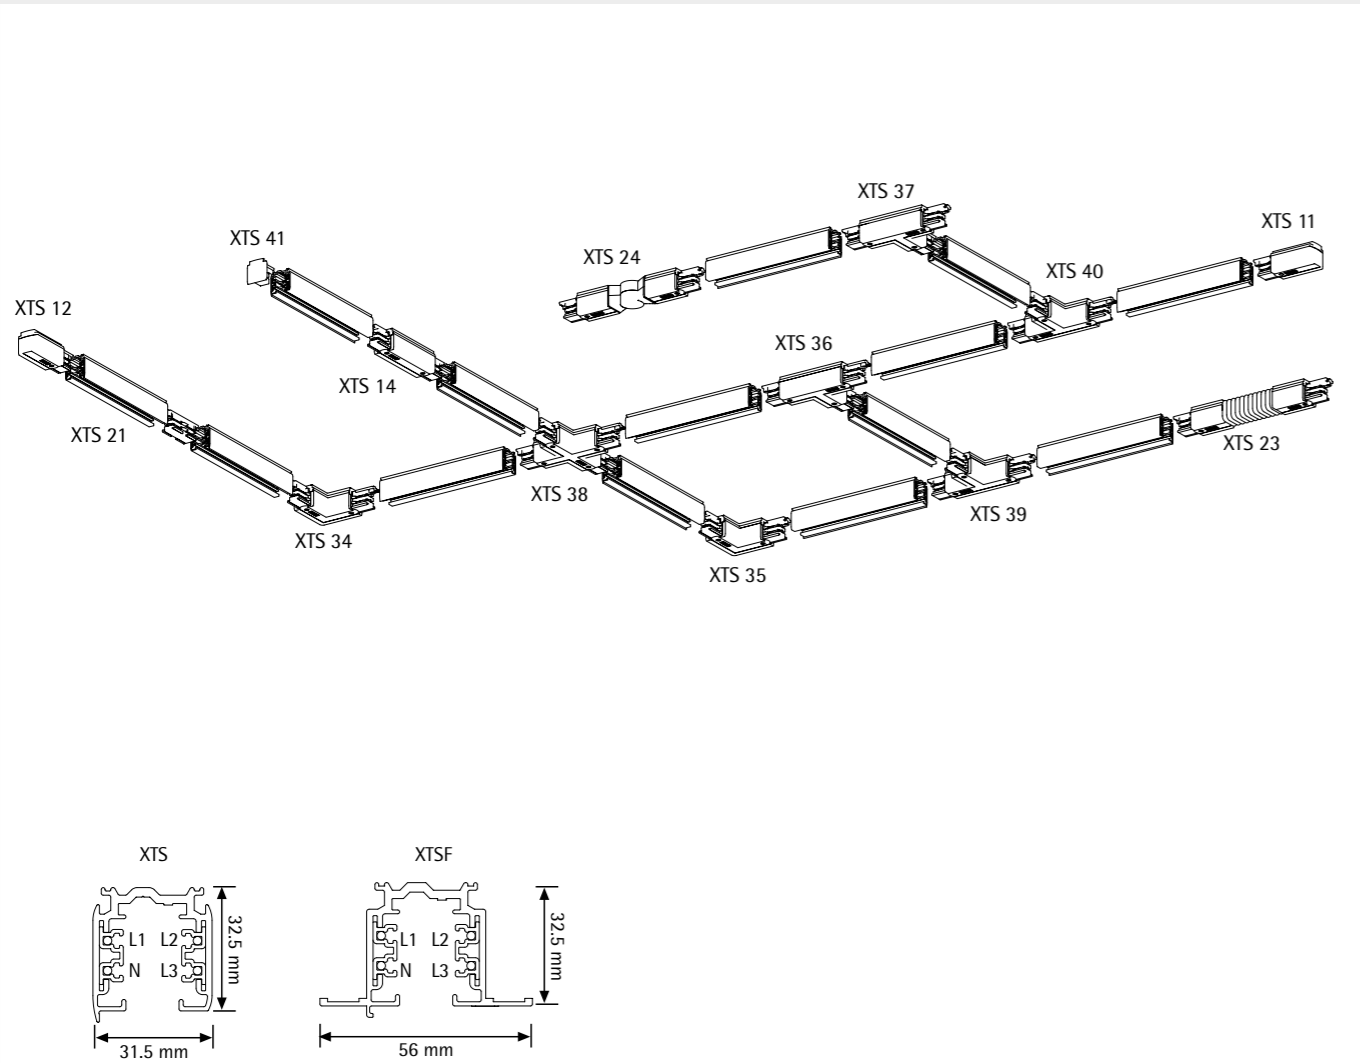

The recommended fastening distance is 1000 mm.
NOTE: A load not heavier than 10 kg may hang on a power takeoff adapter, the pull strength being 100 N (1kp = 9.81N) and the maximum torque 2.5 Nm. (GA 69 5 kg/50 N).

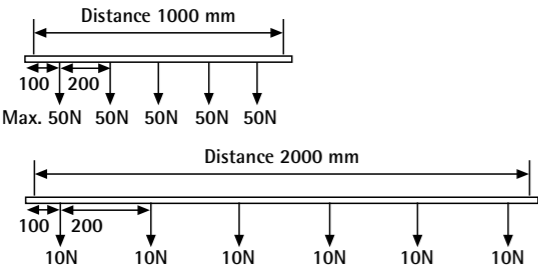


| L/mm | a/mm | b/mm | c/mm | d/mm |
|------|------|------|------|------|
| 1000 | 250 | 1000 | | |
| 2000 | 250 | | | |
| 3000 | 250 | | 1000 | 1000 |
| 4000 | 250 | | 1500 | 1000 |

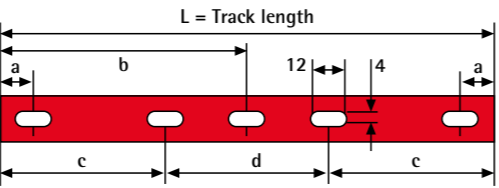

GLOBAL Trac Pro tracks


Available colours: – 1 grey (AW 202JR), –2 black (RAL 9005), –3 white (RAL 9010).

XTS
4100–4400



| Type | EAN code | Dimensions in mm/ track length | Surface treatment/colour/ material | PCS/ Package |
|-------------|-------------------|-----------------------------------|--|-----------------|
| XTS 4100–1 | 64100 14 507 01–5 | 1000 | Grey | 4/240 |
| XTS 4100–2 | 64100 14 506 01–8 | 1000 | Black | 4/240 |
| XTS 4100–3 | 64100 14 507 06–0 | 1000 | White | 4/240 |
| XTS 4200–1 | 64100 14 507 02–2 | 2000 | Grey | 4/240 |
| XTS 4200–2 | 64100 14 506 02–5 | 2000 | Black | 4/240 |
| XTS 4200–3 | 64100 14 507 07–7 | 2000 | White | 4/240 |
| XTS 4300–1 | 64100 14 507 03–9 | 3000 | Grey | 4/240 |
| XTS 4300–2 | 64100 14 506 03–2 | 3000 | Black | 4/240 |
| XTS 4300–3 | 64100 14 507 08–4 | 3000 | White | 4/240 |
| XTS 4400–1 | 64100 14 507 04–6 | 4000 | Grey | 4/240 |
| XTS 4400–2 | 64100 14 506 04–9 | 4000 | Black | 4/240 |
| XTS 4400–3 | 64100 14 507 09–1 | 4000 | White | 4/240 |
| XTSF 4100–1 | 64100 14 507 51–0 | 1000 | Grey | 6/180 |
| XTSF 4100–2 | 64100 14 506 51–3 | 1000 | Black | 6/180 |
| XTSF 4100–3 | 64100 14 507 56–5 | 1000 | White | 6/180 |
| XTSF 4200–1 | 64100 14 507 52–7 | 2000 | Grey | 6/180 |
| XTSF 4200–2 | 64100 14 506 52–0 | 2000 | Black | 6/180 |
| XTSF 4200–3 | 64100 14 507 57–2 | 2000 | White | 6/180 |
| XTSF 4300–1 | 64100 14 507 53–4 | 3000 | Grey | 6/180 |
| XTSF 4300–2 | 64100 14 506 53–7 | 3000 | Black | 6/180 |
| XTSF 4300–3 | 64100 14 507 58–9 | 3000 | White | 6/180 |
| XTSF 4400–1 | 64100 14 507 54–1 | 4000 | Grey | 6/180 |
| XTSF 4400–2 | 64100 14 506 54–4 | 4000 | Black | 6/180 |
| XTSF 4400–3 | 64100 14 507 59–6 | 4000 | White | 6/180 |


XTSF
4100–4400

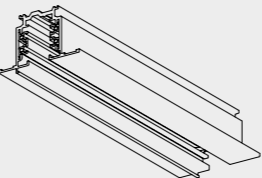


GLOBAL Trac Pro accessories

Power supply option in all connectors except XTS 21, XTS 23 and XTS 24. All materials used are halogen free and VO-self-extinguishing.
Available colours: –1 grey (RAL 7040), –2 black (RAL 9005), –3 white (RAL 9010).

End feed
XTS 11











XTS 12



| Type | EAN code | Polarity ridge | Surface treatment/colour/ material | PCS/ Package |
|----------|-------------------|-------------------|--|-----------------|
| XTS 11–1 | 64100 14 507 15–2 | | Grey | 10/100 |
| XTS 11–2 | 64100 14 506 11–7 | | Black | 10/100 |
| XTS 11–3 | 64100 14 507 11–4 | | White | 10/100 |
| XTS 12–1 | 64100 14 507 16–9 | | Grey | 10/100 |
| XTS 12–2 | 64100 14 506 12–4 | | Black | 10/100 |
| XTS 12–3 | 64100 14 507 12–1 | | White | 10/100 |


GLOBAL Trac Pro accessories

Power supply option in all connectors except XTS 21, XTS 23 and XTS 24.
Available colours: -1 grey (RAL 7040), -2 black (RAL 9005), -3 white (RAL 9010).

| | | | | | |
|---|----------|-------------------|--|--|-----------------|
| Middle feed XTS 14 | | | | | |
| | Type | EAN code | Polarity ridge | Surface treatment/colour/ material | PCS/ Package |
|  | XTS 14-1 | 64100 14 507 17-6 | | Grey | 5/50 |
| | XTS 14-2 | 64100 14 506 14-8 | | Black | 5/50 |
| | XTS 14-3 | 64100 14 507 14-5 | | White | 5/50 |
| Straight connector XTS 21 | XTS 21-1 | 64100 14 507 18-3 | | Grey | 10/100 |
| | XTS 21-2 | 64100 14 506 21-6 | | Black | 10/100 |
| | XTS 21-3 | 64100 14 507 21-3 | | White | 10/100 |
| Flexible corner connector XTS 23 | XTS 23-1 | 64100 14 507 20-6 | | Grey | 5/25 |
| | XTS 23-2 | 64100 14 506 23-0 | | Black | 5/25 |
| | XTS 23-3 | 64100 14 507 23-7 | | White | 5/25 |
| Adjustable corner connector XTS 24 | XTS 24-1 | 64100 14 507 19-0 | | Grey | 5/25 |
| | XTS 24-2 | 64100 14 506 24-7 | | Black | 5/25 |
| | XTS 24-3 | 64100 14 507 24-4 | | White | 5/25 |
| L-feed XTS 34, 35 | XTS 34-1 | 64100 14 507 25-1 |  | Grey | 5/25 |
| | XTS 34-2 | 64100 14 506 34-6 | | Black | 5/25 |
| | XTS 34-3 | 64100 14 507 34-3 | | White | 5/25 |
| | XTS 35-1 | 64100 14 507 26-8 |  | Grey | 5/25 |
| | XTS 35-2 | 64100 14 506 35-3 | | Black | 5/25 |
| | XTS 35-3 | 64100 14 507 35-0 | | White | 5/25 |
| | XTS 36-1 | 64100 14 507 27-5 |  | Grey | 5/25 |
| | XTS 36-2 | 64100 14 506 36-0 | | Black | 5/25 |
| | XTS 36-3 | 64100 14 507 36-7 | | White | 5/25 |
| T-feed XTS 36, 37, 39, 40 | XTS 37-1 | 64100 14 507 28-2 |  | Grey | 5/25 |
| | XTS 37-2 | 64100 14 506 37-7 | | Black | 5/25 |
| | XTS 37-3 | 64100 14 507 37-4 | | White | 5/25 |
| | XTS 39-1 | 64100 14 507 30-5 |  | Grey | 5/25 |
| | XTS 39-2 | 64100 14 506 39-1 | | Black | 5/25 |
| | XTS 39-3 | 64100 14 507 39-8 | | White | 5/25 |
| | XTS 40-1 | 64100 14 507 31-2 |  | Grey | 5/25 |
| | XTS 40-2 | 64100 14 506 40-7 | | Black | 5/25 |
| | XTS 40-3 | 64100 14 507 40-4 | | White | 5/25 |
| X-feed XTS 38 | XTS 38-1 | 64100 14 507 29-9 |  | Grey | 5/25 |
| | XTS 38-2 | 64100 14 506 38-4 | | Black | 5/25 |
| | XTS 38-3 | 64100 14 507 38-1 | | White | 5/25 |
| End cap XTS 41 | XTS 41-1 | 64100 14 507 32-9 | | Grey | 10/100 |
| | XTS 41-2 | 64100 14 506 41-4 | | Black | 10/100 |
| | XTS 41-3 | 64100 14 507 41-1 | | White | 10/100 |


GLOBAL Trac Pro other parts

Available colours: -1 grey (RAL 7040), -2 black (RAL 9005), -3 white (RAL 9010).
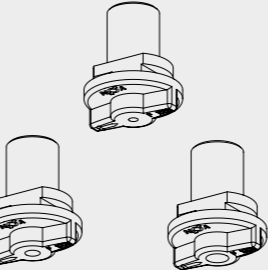
| | | | | |
|---|------------|--|--|-----------------|
| Hook base XTAK 142, 144, 146 | Type | EAN code | Surface treatment/colour/ material | PCS/ Package |
|  | XTAK 142-1 | 64100 14 507 43-5 For 2 mm wire/hook | Grey | 50/250 |
| | XTAK 142-2 | 64100 14 506 42-1 For 2 mm wire/hook | Black | 50/250 |
| | XTAK 142-3 | 64100 14 507 42-8 For 2 mm wire/hook | White | 50/250 |
| | XTAK 144-1 | 64100 14 507 45-9 For M4 nut/rod | Grey | 50/250 |
| | XTAK 144-2 | 64100 14 506 44-5 For M4 nut/rod | Black | 50/250 |
| | XTAK 144-3 | 64100 14 507 44-2 For M4 nut/rod | White | 50/250 |
| | XTAK 146-1 | 64100 14 507 47-3 For M6 nut/rod | Grey | 50/250 |
| | XTAK 146-2 | 64100 14 506 46-9 For M6 nut/rod | Black | 50/250 |
| | XTAK 146-3 | 64100 14 507 46-6 For M6 nut/rod | White | 50/250 |
| Hook XTAK 11 | XTAK 11-1 | 64100 14 500 79-5 Hook 2 mm | Steel | 100/5000 |
| Tool XTSV 12 | XTSV 12 | 64100 14 500 99-3 Bending tool for power wires | Blue | 1/100 |
| Cover plates XTSF 10 | XTSF 10-1 | 64100 14 500 41-2 Cover plate for XTS11-14 | Grey | 1/100 |
| | XTSF 10-2 | 64100 14 506 61-2 Cover plate for XTS11-14 | Black | 1/100 |
| | XTSF 10-3 | 64100 14 507 61-9 Cover plate for XTS11-14 | White | 1/100 |
| XTSF 30 | XTSF 30-1 | 64100 14 506 42-9 Cover plate for XTS34-40 | Grey | 1/100 |
| | XTSF 30-2 | 64100 14 506 62-9 Cover plate for XTS34-40 | Black | 1/100 |
| | XTSF 30-3 | 64100 14 507 62-6 Cover plate for XTS34-40 | White | 1/100 |
| XTSF 40 | XTSF 40-1 | 64100 14 506 43-6 Outlet/cover plate for feeds | Grey | 1/100 |
| | XTSF 40-2 | 64100 14 506 63-6 Outlet/cover plate for feeds | Black | 1/100 |
| | XTSF 40-3 | 64100 14 507 63-3 Outlet/cover plate for feeds | White | 1/100 |
| Cover strip XTSP 11 | XTSP 11-2 | 64100 14 530 99-0 Cover strip, 3000 mm | Black | 10/100 |
| | XTSP 11-3 | 64100 14 530 98-3 Cover strip, 3000 mm | White | 10/100 |

Use of L- and T-accessories

Red line indicates polarity ridge

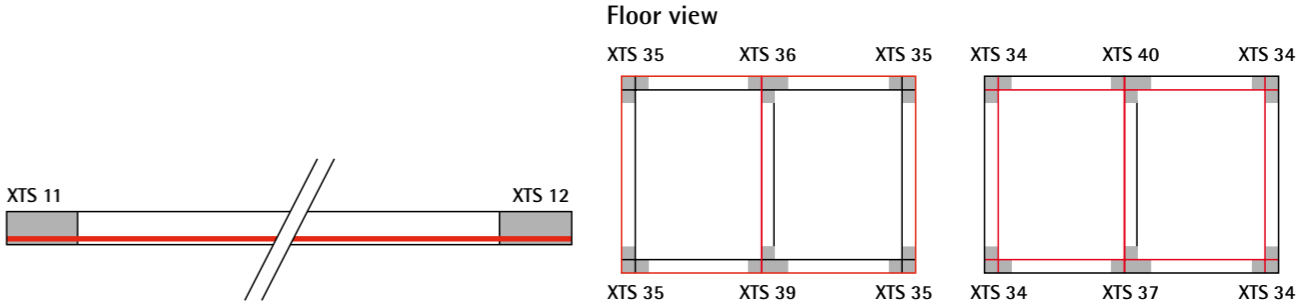



GLOBAL Trac Pulse control

GLOBAL Trac Pulse control is a lighting track system that includes both normal input voltage and wires for transmitting the control signal to the lights. This makes it possible to use smart control systems without central units. Of these, the DALI, DMX, LON and EIB standards are the most widely known. Various manufacturers provide control units, detectors and fixtures for the control systems. All control systems share the same goal: to transmit the control signal to individual lights using the GLOBAL Trac Pulse control's wires and to create dynamic lighting.



Needs-based lighting

Dynamic lighting means that the lighting changes according to the situation and need. Lights can be turned on and off, brightened or dimmed flexibly as separate groups. This also saves energy, because lights are only turned on where necessary.



Directing attention

Dynamic lighting is used to focus attention in store settings and shop windows. It is also used in museums and exhibitions to highlight details and in restaurants, auditoriums, hotel lobbies and many other places.




GLOBAL Trac Pulse control

L1/L2/L3/neutral/ground 16 A/400 V + control 3 x 1 A/50 V FELV AC
DALI (FELV), DMX, LON, EIB, 1-10 V etc. compatible.


GLOBAL Trac Pulse control tracks

Available colours: -1 grey (AW202JR), -2 black (RAL 9005), -3 white (RAL 9010).

XTSC
6100-6400



XTSCF
6100-6400




| Type | EAN code | Dimensions in mm/ track length | Surface treatment/colour/ material | PCS/ Package |
|-------------|-------------------|-----------------------------------|--|-----------------|
| XTSC6100-1 | 64100 14 531 42-3 | 1000 | grey | 4/240 |
| XTSC6100-2 | 64100 14 531 43-0 | 1000 | black | 4/240 |
| XTSC6100-3 | 64100 14 531 47-8 | 1000 | white | 4/240 |
| XTSC6200-1 | 64100 14 531 48-5 | 2000 | grey | 4/240 |
| XTSC6200-2 | 64100 14 531 49-2 | 2000 | black | 4/240 |
| XTSC6200-3 | 64100 14 531 50-8 | 2000 | white | 4/240 |
| XTSC6300-1 | 64100 14 531 51-5 | 3000 | grey | 4/240 |
| XTSC6300-2 | 64100 14 531 52-2 | 3000 | black | 4/240 |
| XTSC6300-3 | 64100 14 531 53-9 | 3000 | white | 4/240 |
| XTSC6400-1 | 64100 14 531 54-6 | 4000 | grey | 4/240 |
| XTSC6400-2 | 64100 14 531 55-3 | 4000 | black | 4/240 |
| XTSC6400-3 | 64100 14 531 56-0 | 4000 | white | 4/240 |
| XTSCF6100-1 | 64100 14 531 57-7 | 1000 | grey | 6/180 |
| XTSCF6100-2 | 64100 14 531 58-4 | 1000 | black | 6/180 |
| XTSCF6100-3 | 64100 14 531 59-1 | 1000 | white | 6/180 |
| XTSCF6200-1 | 64100 14 531 60-7 | 2000 | grey | 6/180 |
| XTSCF6200-2 | 64100 14 531 61-4 | 2000 | black | 6/180 |
| XTSCF6200-3 | 64100 14 531 62-1 | 2000 | white | 6/180 |
| XTSCF6300-1 | 64100 14 531 63-8 | 3000 | grey | 6/180 |
| XTSCF6300-2 | 64100 14 531 64-5 | 3000 | black | 6/180 |
| XTSCF6300-3 | 64100 14 531 68-3 | 3000 | white | 6/180 |
| XTSCF6400-1 | 64100 14 531 69-0 | 4000 | grey | 6/180 |
| XTSCF6400-2 | 64100 14 531 70-6 | 4000 | black | 6/180 |
| XTSCF6400-3 | 64100 14 531 71-3 | 4000 | white | 6/180 |


GLOBAL Trac Pulse control accessories

Power supply in all connectors except XTS(C)621 and XTS(C)623. All materials used are halogen free and V0-self-extinguishing.
Available colours: -1 grey (RAL 7040), -2 black (RAL 9005), -3 white (RAL 9010).


End feed
XTSC 611




XTSC 612




| Type | EAN code | Polarity ridge | Surface treatment/colour/ material | PCS/ Package |
|-----------|-------------------|-------------------|--|-----------------|
| XTSC611-1 | 64100 14 532 37-6 | | grey | 5/50 |
| XTSC611-2 | 64100 14 532 38-3 | | black | 5/50 |
| XTSC611-3 | 64100 14 532 39-0 | | white | 5/50 |
| XTSC612-1 | 64100 14 532 40-6 | | grey | 5/50 |
| XTSC612-2 | 64100 14 532 41-3 | | black | 5/50 |
| XTSC612-3 | 64100 14 532 42-0 | | white | 5/50 |

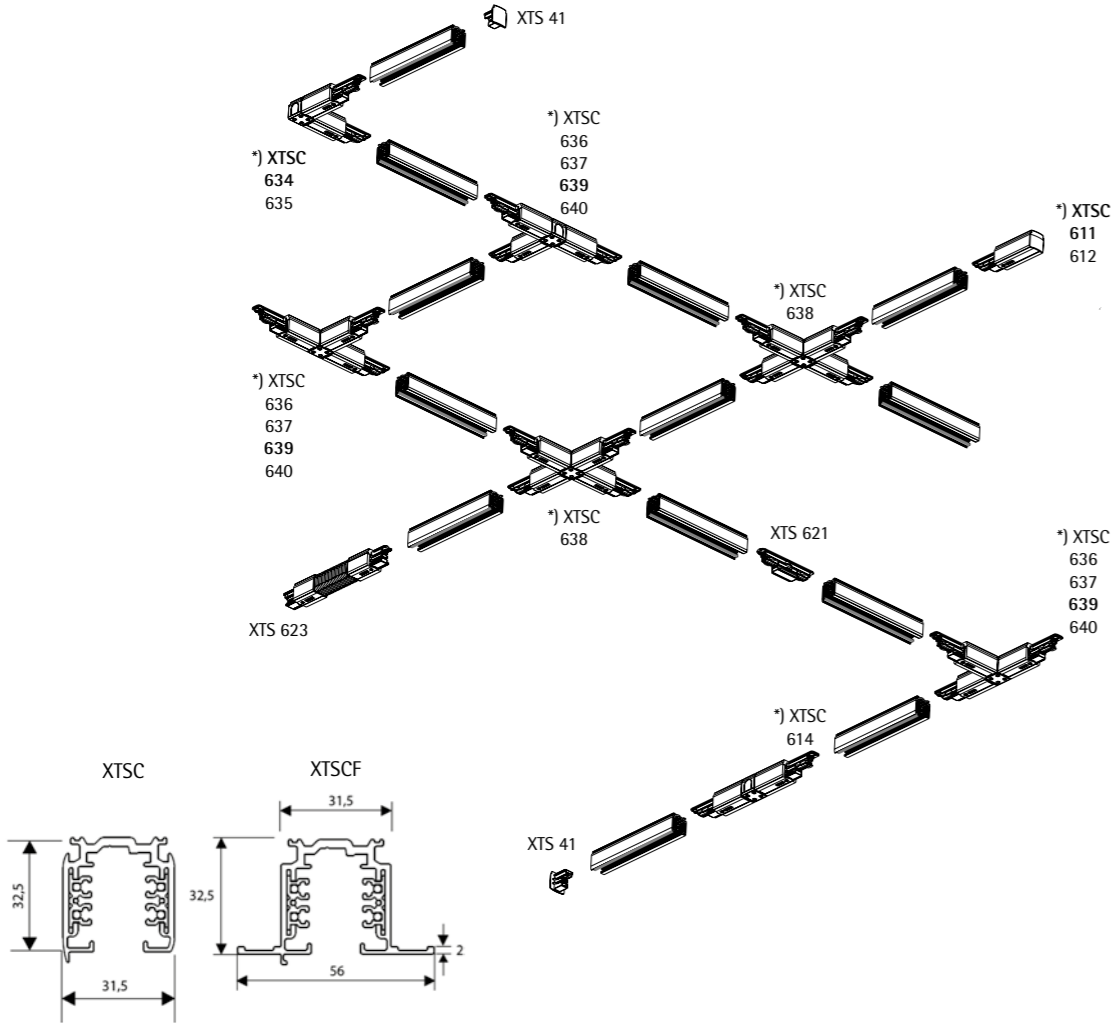

The recommended fastening distance is 1000 mm.
NOTE: A load not heavier than 10 kg may hang on a power
takeoff adapter, the pull strength being 100 N (1kp = 9.81N)
and the maximum torque 2.5 Nm. (GA 69 5 kg/50 N).

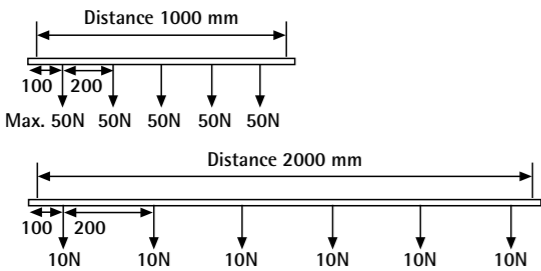






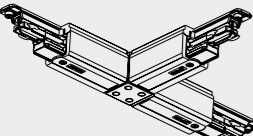




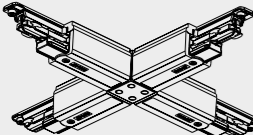



| L/mm | a/mm | b/mm | c/mm | d/mm |
|------|------|------|------|------|
| 1000 | 250 | 1000 | | |
| 2000 | 250 | | | |
| 3000 | 250 | | 1000 | 1000 |
| 4000 | 250 | | 1500 | 1000 |

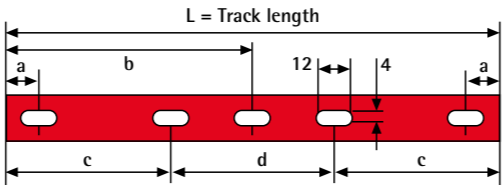





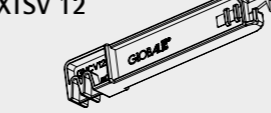


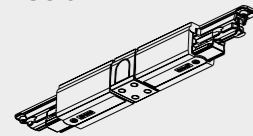

GLOBAL Trac Pulse control accessories

Power supply in all connectors except XTS(C)621 and XTS(C)623.
Available colours: -1 grey (RAL 7040), -2 black (RAL 9005), -3 white (RAL 9010).
All materials used are halogen free and VO-self-extinguishing.

| | | | | | |
|---|-------------|-------------------|---|--|-----------------|
| Middle feed XTSC 614 | Type | EAN code | Polarity ridge | Surface treatment/colour/ material | PCS/ Package |
|  | XTSC614-1 | 64100 14 532 44-4 | | grey | 5/25 |
| | XTSC614-2 | 64100 14 532 45-1 | | black | 5/25 |
| | XTSC614-3 | 64100 14 532 46-8 | | white | 5/25 |
| Straight connector XTSC 621 | XTS(C)621-1 | 64100 14 532 10-9 | | grey | 10/100 |
|  | XTS(C)621-2 | 64100 14 532 11-6 | | black | 10/100 |
| | XTS(C)621-3 | 64100 14 532 12-3 | | white | 10/100 |
| Flexible corner connector XTSC 623 | XTS(C)623-1 | 64100 14 532 13-0 | | grey | 5/25 |
|  | XTS(C)623-2 | 64100 14 532 14-7 | | black | 5/25 |
| | XTS(C)623-3 | 64100 14 532 15-4 | | white | 5/25 |
| L-feed XTSC 634, 635 | XTSC634-1 | 64100 14 532 47-5 |  | grey | 5/25 |
|  | XTSC634-2 | 64100 14 532 48-2 | | black | 5/25 |
| | XTSC634-3 | 64100 14 532 49-9 | | white | 5/25 |
| | XTSC635-1 | 64100 14 532 50-5 |  | grey | 5/25 |
| | XTSC635-2 | 64100 14 532 51-2 | | black | 5/25 |
| | XTSC635-3 | 64100 14 532 55-0 | | white | 5/25 |
| T-feed XTSC 636, 637, 639, 640 | XTSC636-1 | 64100 14 532 56-7 |  | grey | 1/20 |
|  | XTSC636-2 | 64100 14 532 57-4 | | black | 1/20 |
| | XTSC636-3 | 64100 14 532 58-1 | | white | 1/20 |
| | XTSC637-1 | 64100 14 532 59-8 |  | grey | 1/20 |
| | XTSC637-2 | 64100 14 532 60-4 | | black | 1/20 |
| | XTSC637-3 | 64100 14 532 63-5 | | white | 1/20 |
| | XTSC639-1 | 64100 14 532 69-7 |  | grey | 1/20 |
| | XTSC639-2 | 64100 14 532 70-3 | | black | 1/20 |
| | XTSC639-3 | 64100 14 532 71-0 | | white | 1/20 |
| | XTSC640-1 | 64100 14 532 72-7 |  | grey | 1/20 |
| | XTSC640-2 | 64100 14 532 73-4 | | black | 1/20 |
| | XTSC640-3 | 64100 14 532 74-1 | | white | 1/20 |
| X-feed XTSC 638 | XTSC638-1 | 64100 14 532 64-2 |  | grey | 1/10 |
|  | XTSC638-2 | 64100 14 532 65-9 | | black | 1/10 |
| | XTSC638-3 | 64100 14 532 66-6 | | white | 1/10 |
| End cap XTS 41 | XTS41-1 | 64100 14 507 32-9 | | grey | 10/100 |
|  | XTS41-2 | 64100 14 506 41-4 | | black | 10/100 |
| | XTS41-3 | 64100 14 507 41-1 | | white | 10/100 |

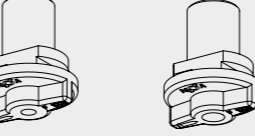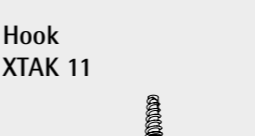
GLOBAL Trac Pulse control accessories

Available colours: -1 grey (RAL 7040), -2 black (RAL 9005), -3 white (RAL 9010).

| | | | | |
|---|-----------|-------------------|--|-----------------|
| Hook base XTAK 142, 144, 146 | Type | EAN code | Surface treatment/colour/ material | PCS/ Package |
|  | XTAK142-1 | 64100 14 507 43-5 | Grey | 50/250 |
| | XTAK142-2 | 64100 14 506 42-1 | Black | 50/250 |
| | XTAK142-3 | 64100 14 507 42-8 | White | 50/250 |
|  | XTAK144-1 | 64100 14 507 45-9 | Grey | 50/250 |
| | XTAK144-2 | 64100 14 506 44-5 | Black | 50/250 |
| | XTAK144-3 | 64100 14 507 44-2 | White | 50/250 |
|  | XTAK146-1 | 64100 14 507 47-3 | Grey | 50/250 |
| | XTAK146-2 | 64100 14 506 46-9 | Black | 50/250 |
| | XTAK146-3 | 64100 14 507 46-6 | White | 50/250 |
| Hook XTAK 11 | XTAK11-1 | 64100 14 500 79-5 | Steel | 100/5000 |
|  | XTSV12 | 64100 14 500 99-3 | Blue | 1/100 |
| | XTSF610-1 | 64100 14 532 77-2 | grey | 1/100 |
| | XTSF610-2 | 64100 14 532 80-2 | black | 1/100 |
|  | XTSF610-3 | 64100 14 532 81-9 | white | 1/100 |
| | XTSF630-1 | 64100 14 532 82-6 | grey | 1/100 |
| | XTSF630-2 | 64100 14 532 83-3 | black | 1/100 |
|  | XTSF630-3 | 64100 14 532 84-0 | white | 1/100 |
| | XTSF40-1 | 64100 14 506 43-6 | Grey | 1/100 |
| | XTSF40-2 | 64100 14 506 63-6 | Black | 1/100 |
|  | XTSF40-3 | 64100 14 507 63-3 | White | 1/100 |
| | XTSP11-2 | 64100 14 530 99-0 | Black | 10/100 |
| | XTSP11-3 | 64100 14 530 98-3 | White | 10/100 |
|  | | | | |
| | | | | |
| | | | | |
| Cover strip XTSP 11 | | | | |
|  | | | | |
| | | | | |
| | | | | |

Use of L- and T-accessories

Red line indicates ground polarity ridge

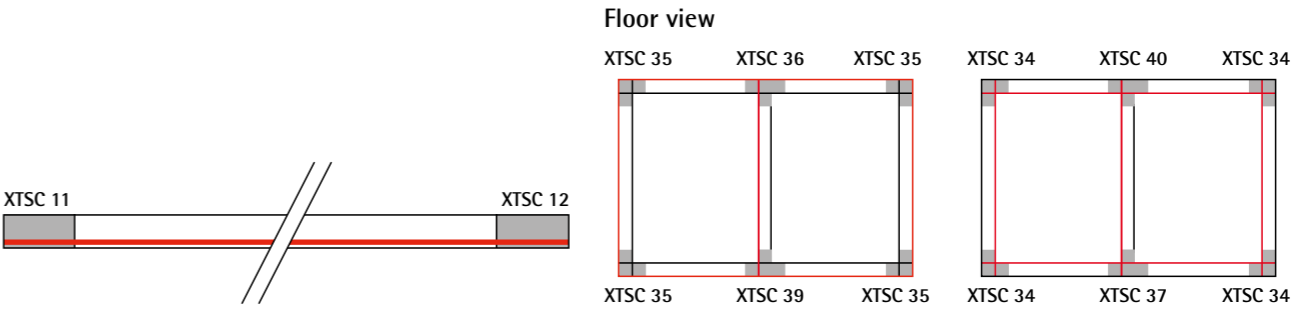



GLOBAL Trac Base

GLOBAL Trac Base is a compact, elegant-looking one-circuit basic track. The compact track is light to handle and simple to install. Diverse installation options are part of the package. Quick and easy installation results in overall cost savings.



From homes to exhibition stands

GLOBAL Trac Base is for places where the discrete and elegant appearance of the one-circuit track is most useful: homes, shop windows and exhibition structures.



Recessed version also available

There is a recessed version of GLOBAL Trac Base for suspended ceilings, too. The standard colours are grey, white and black.





Easy connection

GLOBAL Trac Base connectors are quick and easy to mount. The connectors and other accessories are reliable, and the customer can trust that the installation goes nice and smoothly.




GLOBAL Trac Base


L1/16 A/230 V. IP20.

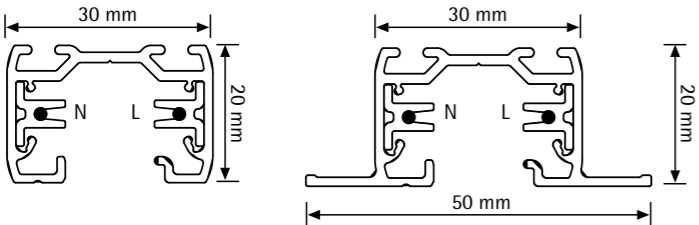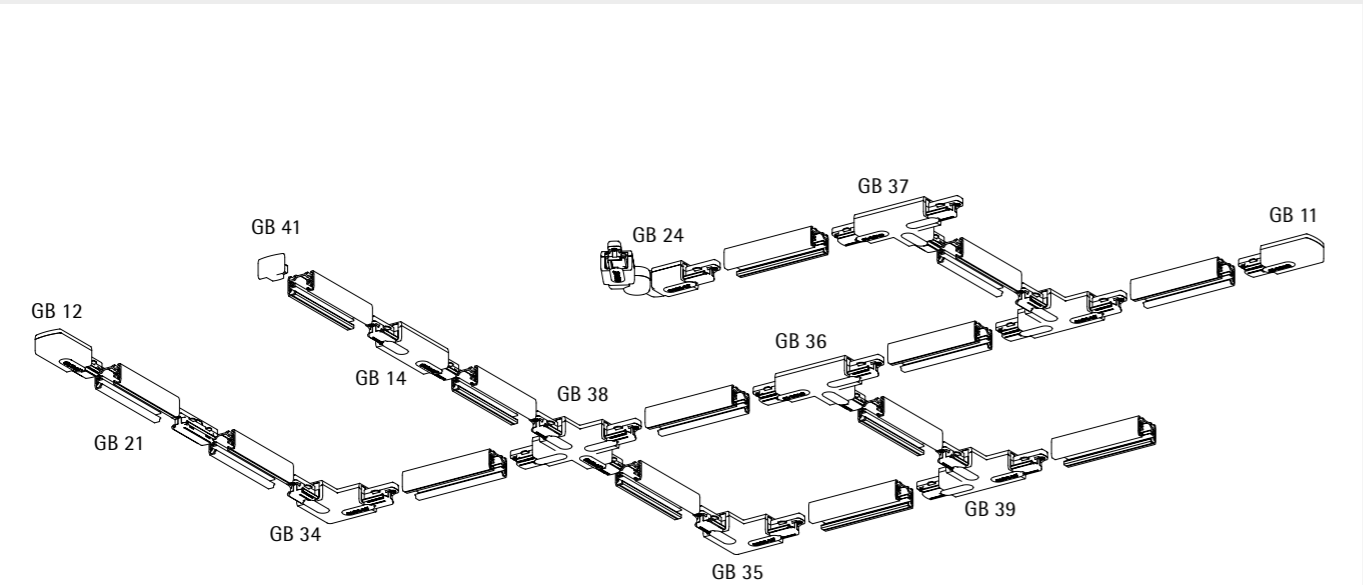

The recommended fastening distance is 1000 mm.
NOTE: A load not heavier than 10 kg may hang on a power takeoff adapter, the pull strength being 100 N (1kp = 9.81N) and the maximum torque 2.5 Nm. (GB 66 5 kg/50 N).

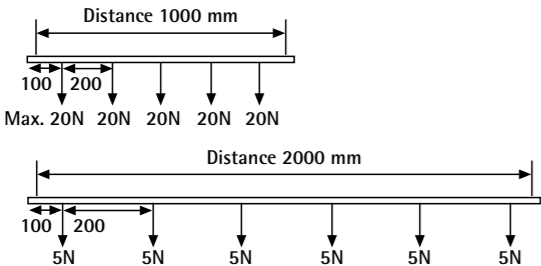


| L/mm | a/mm | b/mm | c/mm | d/mm |
|------|------|------|------|------|
| 1000 | 250 | | | |
| 2000 | 250 | 1000 | | |
| 3000 | 250 | | 1000 | 1000 |

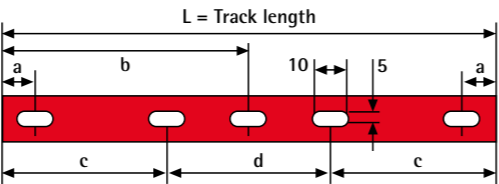

GLOBAL Trac Base tracks


Available colours: –1 grey (AW202JR), –2 black (RAL 9005), –3 white (RAL 9010).

GB
2100–2300



| Type | EAN code | Dimensions in mm/ track length | Surface treatment/colour/ material | PCS/ Package |
|-----------|-------------------|-----------------------------------|--|-----------------|
| GB 2100–1 | 64100 14 509 01–9 | 1000 | Grey | 8/480 |
| GB 2100–2 | 64100 14 508 01–2 | 1000 | Black | 8/480 |
| GB 2100–3 | 64100 14 509 06–4 | 1000 | White | 8/480 |
| GB 2200–1 | 64100 14 509 02–6 | 2000 | Grey | 8/480 |
| GB 2200–2 | 64100 14 508 02–9 | 2000 | Black | 8/480 |
| GB 2200–3 | 64100 14 509 07–1 | 2000 | White | 8/480 |
| GB 2300–1 | 64100 14 509 03–3 | 3000 | Grey | 8/480 |
| GB 2300–2 | 64100 14 508 03–6 | 3000 | Black | 8/480 |
| GB 2300–3 | 64100 14 509 08–8 | 3000 | White | 8/480 |

GBF
2100–2300




| | | | | |
|------------|-------------------|------|-------|-------|
| GBF 2100–1 | 64100 14 509 86–6 | 1000 | Grey | 6/180 |
| GBF 2100–2 | 64100 14 508 91–3 | 1000 | Black | 6/180 |
| GBF 2100–3 | 64100 14 509 91–0 | 1000 | White | 6/180 |
| GBF 2200–1 | 64100 14 509 87–3 | 2000 | Grey | 6/180 |
| GBF 2200–2 | 64100 14 508 92–0 | 2000 | Black | 6/180 |
| GBF 2200–3 | 64100 14 509 92–7 | 2000 | White | 6/180 |
| GBF 2300–1 | 64100 14 509 88–0 | 3000 | Grey | 6/180 |
| GBF 2300–2 | 64100 14 508 93–7 | 3000 | Black | 6/180 |
| GBF 2300–3 | 64100 14 509 93–4 | 3000 | White | 6/180 |


GLOBAL Track Base accessories

Power supply option in all connectors except GB 21 ja GB 24. All materials used are halogen free and VO-self-extinguishing.
Available colours: –1 grey (RAL 7040), –2 black (RAL 9005), –3 white (RAL 9010).

End feed
GB 11

















GB 12



| Type | EAN code | Polarity groove | Surface treatment/colour/ material | PCS/ Package |
|---------|-------------------|--------------------|--|-----------------|
| GB 11–1 | 64100 14 509 15–6 | | Grey | 10/100 |
| GB 11–2 | 64100 14 508 11–1 | | Black | 10/100 |
| GB 11–3 | 64100 14 509 11–8 | | White | 10/100 |
| GB 12–1 | 64100 14 509 16–3 | | Grey | 10/100 |
| GB 12–2 | 64100 14 508 12–8 | | Black | 10/100 |
| GB 12–3 | 64100 14 509 12–5 | | White | 10/100 |





GLOBAL Trac Base accessories

Power supply option in all connectors except GB 21 ja GB 24.
Available colours: -1 grey (RAL 7040), -2 black (RAL 9005), -3 white (RAL 9010).

| | | | | | | |
|---|---|---------|-------------------|--|-----------------------------------|-------------|
| Middle feed GB 14 |  | Type | EAN code | Polarity groove | Surface treatment/colour/material | PCS/Package |
| | | GB 14-1 | 64100 14 509 17-0 | | Grey | 5/50 |
| | | GB 14-2 | 64100 14 508 14-2 | | Black | 5/50 |
| | | GB 14-3 | 64100 14 509 14-9 | | White | 5/50 |
| Straight connector GB 21 |  | GB 21-1 | 64100 14 509 18-7 | | Grey | 10/100 |
| | | GB 21-2 | 64100 14 508 21-0 | | Black | 10/100 |
| | | GB 21-3 | 64100 14 509 21-7 | | White | 10/100 |
| | | | | | | |
| Adjustable corner connector GB 24 |  | GB 24-1 | 64100 14 509 19-4 | | Grey | 5/25 |
| | | GB 24-2 | 64100 14 508 24-1 | | Black | 5/25 |
| | | GB 24-3 | 64100 14 509 24-8 | | White | 5/25 |
| | | | | | | |
| L-feed GB 34, 35 |  | GB 34-1 | 64100 14 509 25-5 |  | Grey | 5/25 |
| | | GB 34-2 | 64100 14 508 34-0 | | Black | 5/25 |
| | | GB 34-3 | 64100 14 509 34-7 | | White | 5/25 |
| | | | |  | | |
| | | GB 35-1 | 64100 14 509 26-2 | | Grey | 5/25 |
| | | GB 35-2 | 64100 14 508 35-7 | | Black | 5/25 |
| | | GB 35-3 | 64100 14 509 35-4 | | White | 5/25 |
| | | | | | | |
| T-feed GB 36, 37, 39, 40 |  | GB 36-1 | 64100 14 509 27-9 |  | Grey | 5/25 |
| | | GB 36-2 | 64100 14 508 36-4 | | Black | 5/25 |
| | | GB 36-3 | 64100 14 509 36-1 | | White | 5/25 |
| | | GB 37-1 | 64100 14 509 28-6 |  | Grey | 5/25 |
| | | GB 37-2 | 64100 14 508 37-1 | | Black | 5/25 |
| | | GB 37-3 | 64100 14 509 37-8 | | White | 5/25 |
| | | GB 39-1 | 64100 14 509 30-9 |  | Grey | 5/25 |
| | | GB 39-2 | 64100 14 508 39-5 | | Black | 5/25 |
| | | GB 39-3 | 64100 14 509 39-2 | | White | 5/25 |
| | | GB 40-1 | 64100 14 509 31-6 |  | Grey | 5/25 |
| | | GB 40-2 | 64100 14 508 40-1 | | Black | 5/25 |
| | | GB 40-3 | 64100 14 509 40-8 | | White | 5/25 |
| | | | | | | |
| | | GB 38-1 | 64100 14 509 29-3 |  | Grey | 5/25 |
| | | GB 38-2 | 64100 14 508 38-8 | | Black | 5/25 |
| | | GB 38-3 | 64100 14 509 38-5 | | White | 5/25 |
| X-feed GB 38 |  | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| End cap GB 41 |  | GB 41-1 | 64100 14 509 32-3 | | Grey | 10/100 |
| | | GB 41-2 | 64100 14 508 41-8 | | Black | 10/100 |
| | | GB 41-3 | 64100 14 509 41-5 | | White | 10/100 |
| | | | | | | |


GLOBAL Trac Base other parts

Available colours: -1 grey (RAL 7040), -2 black (RAL 9005), -3 white (RAL 9010).

| | | | | | | |
|-------------------------------------|---|-----------|-------------------|-------------------------|-----------------------------------|-------------|
| Hook base GBA 14 |  | Type | EAN code | | Surface treatment/colour/material | PCS/Package |
| | | GBA 14-1 | 64100 14 509 81-1 | For 2 mm hook | Grey | 50/250 |
| | | GBA 14-2 | 64100 14 508 80-7 | For 2 mm hook | Black | 50/250 |
| | | GBA 14-3 | 64100 14 509 80-4 | For 2 mm hook | White | 50/250 |
| Hook XTAK 11 |  | XTAK 11-1 | 64100 14 500 79-5 | Hook 2 mm | Steel | 100/5000 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| Outlet cover plate GBF 10 |  | GBF 10-2 | 64100 14 508 82-1 | Cover plate for GB11-14 | Black | 1/100 |
| | | GBF 10-3 | 64100 14 509 82-8 | Cover plate for GB11-14 | White | 1/100 |
| | | | | | | |
| | | | | | | |
| GBF 30 |  | GBF 30-2 | 64100 14 508 83-8 | Cover plate for GB34-40 | Black | 1/100 |
| | | GBF 30-3 | 64100 14 509 83-5 | Cover plate for GB34-40 | White | 1/100 |
| | | | | | | |
| | | | | | | |

Use of L- and T-accessories


Red line indicates ground polarity groove

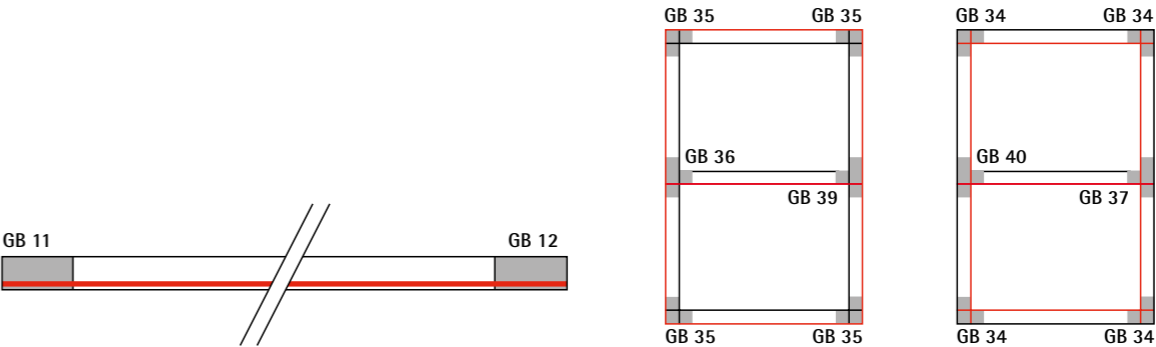


GLOBAL Trac suspension parts

GLOBAL Trac Pro, GLOBAL Pulse control




Straight

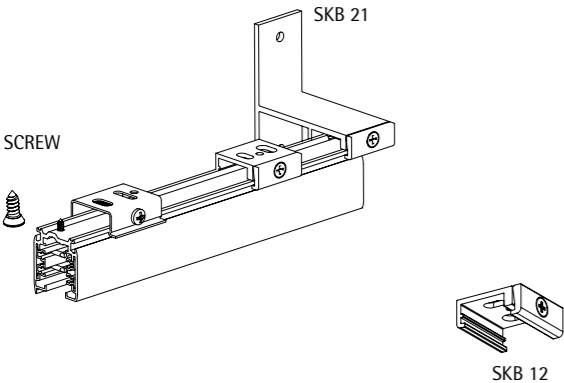

Rod suspension

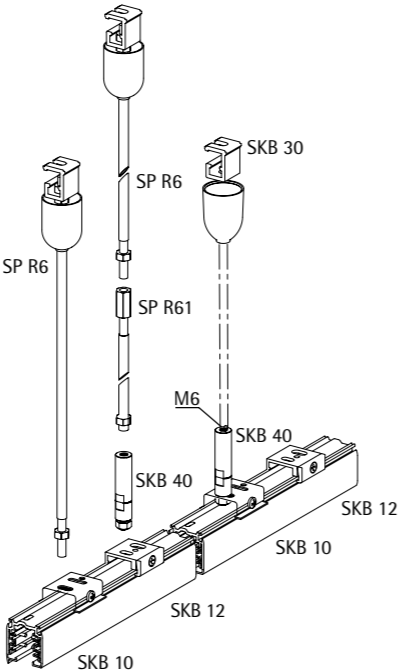


Wire suspension

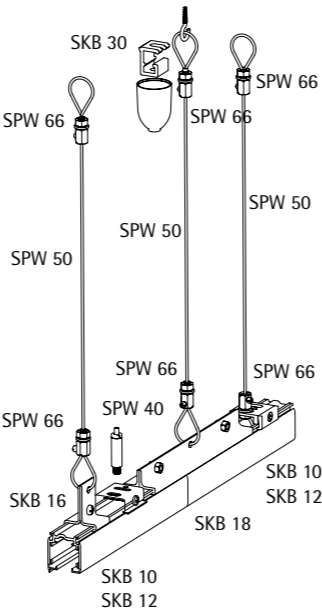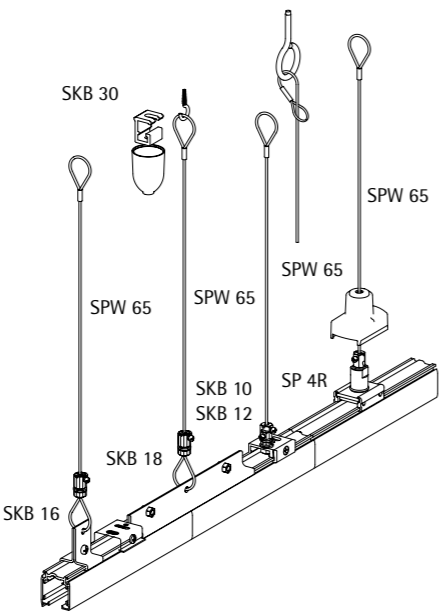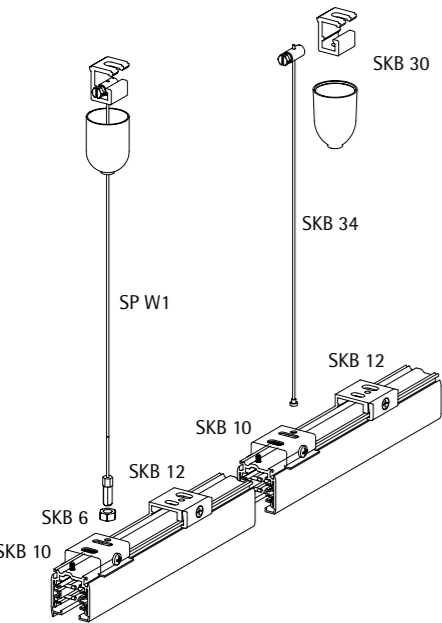


GLOBAL Trac Base



Straight

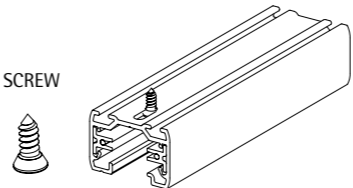

Rod suspension

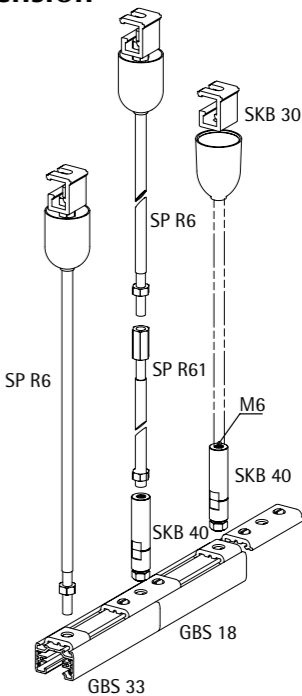


Wire suspension

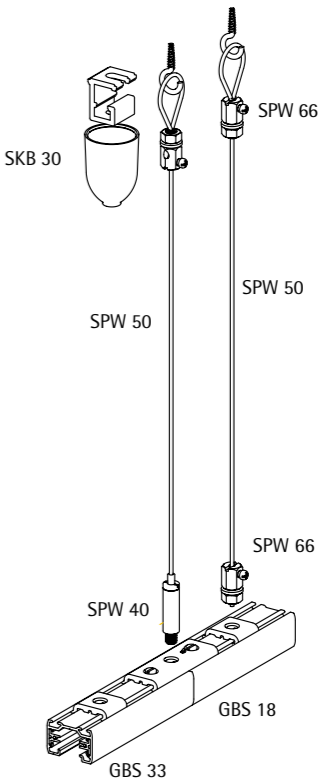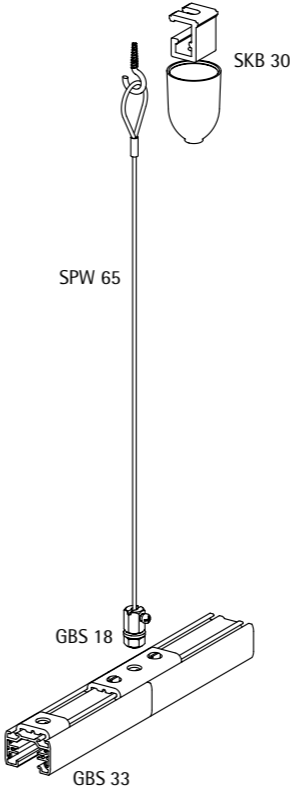

GLOBAL Trac suspension parts


Available colours for parts: -1 grey (AW 202JR), -2 black (RAL 9005), -3 white (RAL 9010).

GLOBAL Trac Pro
GLOBAL Trac Pulse control

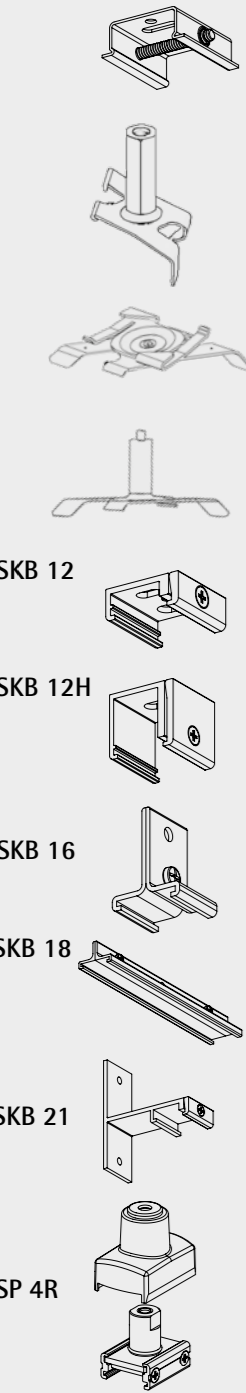


| Type | EAN code | Descr. | Colour | PCS/ Package |
|------------------------|-------------------|--|--------|-----------------|
| Track clamp | | | | |
| SKB10-1 | 64100 14 500 52-8 | Fast mounting clamp, Fmax 200N | Steel | 20/200 |
| SKB10-2 | 64100 14 520 52-6 | Fast mounting clamp, Fmax 200N | Black | 20/200 |
| SKB10-3 | 64100 14 530 52-5 | Fast mounting clamp, Fmax 200N | White | 20/200 |
| SKB11R-1 | 64100 14 500 66-5 | Snap-on clamp for M6 rod, Fmax 150N | grey | 20/200 |
| SKB11R-2 | 64100 14 500 67-2 | Snap-on clamp for M6 rod, Fmax 150N | black | 20/200 |
| SKB11R-3 | 64100 14 500 68-9 | Snap-on clamp for M6 rod, Fmax 150N | white | 20/200 |
| SKB11T-1 | 64100 14 500 60-3 | Snap-on clamp for T-bar, Fmax 50N | grey | 20/200 |
| SKB11T-2 | 64100 14 500 61-0 | Snap-on clamp for T-bar, Fmax 50N | black | 20/200 |
| SKB11T-3 | 64100 14 500 62-7 | Snap-on clamp for T-bar, Fmax 50N | white | 20/200 |
| SKB11WL-1 | 64100 14 500 63-4 | Snap-on clamp for dia 1.5mm wire, Fmax 150N | grey | 20/200 |
| SKB11WL-2 | 64100 14 500 64-1 | Snap-on clamp for dia 1.5mm wire, Fmax 150N | black | 20/200 |
| SKB11WL-3 | 64100 14 500 65-8 | Snap-on clamp for dia 1.5mm wire, Fmax 150N | white | 20/200 |
| SKB12-1 | 64100 14 500 51-1 | Standard clamp, Fmax 200N | Grey | 20/200 |
| SKB12-2 | 64100 14 520 56-4 | Standard clamp, Fmax 200N | Black | 20/200 |
| SKB12-3 | 64100 14 530 51-8 | Standard clamp, Fmax 200N | White | 20/200 |
| SKB12H-1 | 64100 14 522 62-9 | Standard clamp, height 29mm, Fmax 200N | Grey | 100 |
| SKB12H-2 | 64100 14 522 63-6 | Standard clamp, height 29mm, Fmax 200N | Black | 100 |
| SKB12H-3 | 64100 14 522 64-3 | Standard clamp, height 29mm, Fmax 200N | White | 100 |
| SKB16-1 | 64100 14 500 53-5 | Suspension clamp for track, Fmax 200N | Grey | 20/200 |
| SKB16-2 | 64100 14 522 65-0 | Suspension clamp track, Fmax 200N | Black | 20/200 |
| SKB16-3 | 64100 14 530 53-2 | Suspension clamp track, Fmax 200N | White | 20/200 |
| SKB18-1 | 64100 14 500 55-9 | Suspension clamp for track connection, Fmax 200N | Grey | 10/50 |
| SKB18-2 | 64100 14 522 66-7 | Suspension clamp for track connection, Fmax 200N | Black | 10/50 |
| SKB18-3 | 64100 14 530 55-6 | Suspension clamp for track connection, Fmax 200N | White | 10/50 |
| SKB21-1 | 64100 14 500 74-0 | Wall clamp, Fmax 100N | Grey | 5/50 |
| Other suspension parts | | | | |
| SP 4R-1 | 64100 14 507 68-8 | Point clamp suspension for M6, Fmax 200N | Grey | 10/100 |
| SP 4R-2 | 64100 14 506 91-9 | Point clamp suspension for M6, Fmax 200N | Black | 10/100 |
| SP 4R-3 | 64100 14 507 91-6 | Point clamp suspension for M6, Fmax 200N | White | 10/100 |

GLOBAL Trac Base

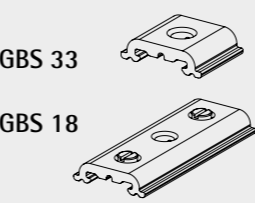

General parts

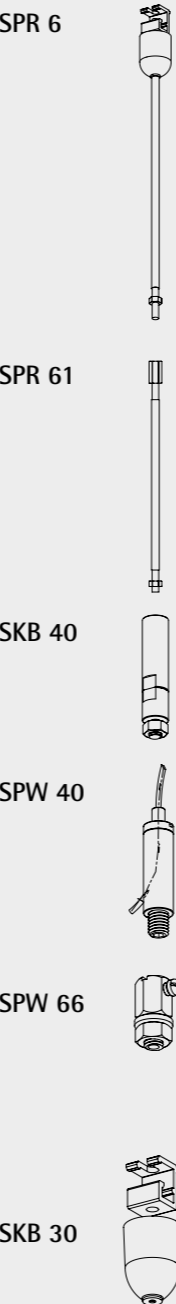


| Type | EAN code | Descr. | Colour | PCS/ Package |
|----------------------|-------------------|---|----------|-----------------|
| Track clamp | | | | |
| GBS 33-9 | 64100 14 508 33-3 | Suspension clamp for track, Fmax 200N | Anodised | 20/200 |
| GBS 18-9 | 64100 14 508 18-0 | Suspension clamp for track connection, Fmax 200N | Anodised | 10/100 |
| Rod suspension | | | | |
| SPR 6-2 | 64100 14 506 87-2 | Rod suspension set 1000mm, Fmax 200N | Black | 10 |
| SPR 6-3 | 64100 14 507 87-9 | Rod suspension set 1000mm, Fmax 200N | White | 10 |
| SPR 61-2 | 64100 14 506 90-2 | Rod extension set 1000mm, Fmax 200N | Black | 10 |
| SPR 61-3 | 64100 14 507 90-9 | Rod extension set 1000mm, Fmax 200N | White | 10 |
| SKB 40-1 | 64100 14 502 48-5 | Height adjusting sleeve for M6 rod, Fmax 200N | Steel | 10/200 |
| SPW 40-1 | 64100 14 502 49-2 | Fast height adjusting sleeve for 1.5 mm wire, Fmax 150N | Steel | 10/200 |
| SPW 66-1 | 64100 14 535 16-2 | Height adjusting sleeve for 1.5mm wire, Fmax 150N | Steel | 100/1000 |
| Mounting accessories | | | | |
| SKB 30-1 | 64100 14 522 74-2 | Ceiling clamp with cup, Fmax 200N | Grey | 10/200 |
| SKB 30-2 | 64100 14 502 44-7 | Ceiling clamp with cup, Fmax 200N | Black | 10/200 |
| SKB 30-3 | 64100 14 530 30-3 | Ceiling clamp with cup, Fmax 200N | White | 10/200 |

GLOBAL Trac suspension parts

Available colours for parts: -1 grey (RAL 7040), -2 black (RAL 9005), -3 white (RAL 9010).

SKB 34




| Type | EAN code | Length | Information | Colour | PCS/ Package |
|------------|-------------------|--------|-------------|--------|-----------------|
| SKB34-1 | 64100 14 502 34-8 | 1.5 | Fmax 150N | Steel | 10/200 |
| SKB34-1/3M | 64100 14 522 67-4 | 3 | Fmax 150N | Steel | 10/200 |
| SKB34-1/5M | 64100 14 522 68-1 | 5 | Fmax 150N | Steel | 10/200 |

SPW 65



| | | | | | |
|---------|-------------------|-----|-----------|-------|--------|
| SPW65-1 | 64100 14 533 15-1 | 1.5 | Fmax 150N | Steel | 10/100 |
|---------|-------------------|-----|-----------|-------|--------|

SPW 50



| | | | | | |
|---------|-------------------|----|-----------|-------|------|
| SPW50-1 | 64100 14 502 50-8 | 50 | Fmax 150N | Steel | 1/10 |
|---------|-------------------|----|-----------|-------|------|

SPW 1



| | | | | | |
|-----------|-------------------|-----|-----------|-------|--------|
| SPW1-1 | 64100 14 522 69-8 | 1.5 | Fmax 150N | Grey | 10/100 |
| SPW1-1/3M | 64100 14 500 47-4 | 3 | Fmax 150N | Grey | 10/100 |
| SPW1-1/5M | 64100 14 500 48-1 | 5 | Fmax 150N | Grey | 10/100 |
| SPW1-2 | 64100 14 506 86-5 | 1.5 | Fmax 150N | Black | 10/100 |
| SPW1-2/3M | 64100 14 522 70-4 | 3 | Fmax 150N | Black | 10/100 |
| SPW1-2/5M | 64100 14 522 71-1 | 5 | Fmax 150N | Black | 10/100 |
| SPW1-3 | 64100 14 507 86-2 | 1.5 | Fmax 150N | White | 10/100 |
| SPW1-3/3M | 64100 14 522 72-8 | 3 | Fmax 150N | White | 10/100 |
| SPW1-3/5M | 64100 14 522 73-5 | 5 | Fmax 150N | White | 10/100 |

GLOBAL Trac suspension sets

GLOBAL Trac Pro, GLOBAL Trac Pulse control

SPW 10SK



| Type | EAN code | Length | Information | Clamp | Colour | PCS/ Package |
|----------------|-------------------|--------|--------------------------------|---------|--------|-----------------|
| SPW10SK-1/1.5M | 64100 14 522 93-3 | 1.5 | Suspension wire set, Fmax 150N | SKB10-1 | Grey | 10/100 |
| SPW10SK-1/3M | 64100 14 500 00-9 | 3 | Suspension wire set, Fmax 150N | SKB10-1 | Grey | 10/100 |
| SPW10SK-1/5M | 64100 14 500 01-6 | 5 | Suspension wire set, Fmax 150N | SKB10-1 | Grey | 10/100 |
| SPW10SK-2/1.5M | 64100 14 522 94-0 | 1.5 | Suspension wire set, Fmax 150N | SKB10-2 | Black | 10/100 |
| SPW10SK-2/3M | 64100 14 500 02-3 | 3 | Suspension wire set, Fmax 150N | SKB10-2 | Black | 10/100 |
| SPW10SK-2/5M | 64100 14 500 03-0 | 5 | Suspension wire set, Fmax 150N | SKB10-2 | Black | 10/100 |
| SPW10SK-3/1.5M | 64100 14 522 95-7 | 1.5 | Suspension wire set, Fmax 150N | SKB10-3 | White | 10/100 |
| SPW10SK-3/3M | 64100 14 500 04-7 | 3 | Suspension wire set, Fmax 150N | SKB10-3 | White | 10/100 |
| SPW10SK-3/5M | 64100 14 500 05-4 | 5 | Suspension wire set, Fmax 150N | SKB10-3 | White | 10/100 |

SPW 11SK



| | | | | | | |
|----------------|-------------------|-----|--|---------|-------|--------|
| SPW11SK-1/1.5M | 64100 14 500 69-6 | 1.5 | Snap-on suspension wire set, Fmax 150N | SKB11-1 | Grey | 10/100 |
| SPW11SK-1/3M | 64100 14 500 76-4 | 3 | Snap-on suspension wire set, Fmax 150N | SKB11-1 | Grey | 10/100 |
| SPW11SK-1/5M | 64100 14 500 82-5 | 5 | Snap-on suspension wire set, Fmax 150N | SKB11-1 | Grey | 10/100 |
| SPW11SK-2/1.5M | 64100 14 500 71-9 | 1.5 | Snap-on suspension wire set, Fmax 150N | SKB11-2 | Black | 10/100 |
| SPW11SK-2/3M | 64100 14 500 77-1 | 3 | Snap-on suspension wire set, Fmax 150N | SKB11-2 | Black | 10/100 |
| SPW11SK-2/5M | 64100 14 500 83-2 | 5 | Snap-on suspension wire set, Fmax 150N | SKB11-2 | Black | 10/100 |
| SPW11SK-3/1.5M | 64100 14 500 73-3 | 1.5 | Snap-on suspension wire set, Fmax 150N | SKB11-3 | White | 10/100 |
| SPW11SK-3/3M | 64100 14 500 78-8 | 3 | Snap-on suspension wire set, Fmax 150N | SKB11-3 | White | 10/100 |
| SPW11SK-3/5M | 64100 14 500 84-9 | 5 | Snap-on suspension wire set, Fmax 150N | SKB11-3 | White | 10/100 |

SPW 12SK



| | | | | | | |
|----------------|-------------------|-----|--------------------------------|---------|-------|--------|
| SPW12SK-1/1.5M | 64100 14 522 96-4 | 1.5 | Suspension wire set, Fmax 150N | SKB12-1 | Grey | 10/100 |
| SPW12SK-1/3M | 64100 14 500 06-1 | 3 | Suspension wire set, Fmax 150N | SKB12-1 | Grey | 10/100 |
| SPW12SK-1/5M | 64100 14 500 07-8 | 5 | Suspension wire set, Fmax 150N | SKB12-1 | Grey | 10/100 |
| SPW12SK-2/1.5M | 64100 14 522 97-1 | 1.5 | Suspension wire set, Fmax 150N | SKB12-2 | Black | 10/100 |
| SPW12SK-2/3M | 64100 14 500 08-5 | 3 | Suspension wire set, Fmax 150N | SKB12-2 | Black | 10/100 |
| SPW12SK-2/5M | 64100 14 500 09-2 | 5 | Suspension wire set, Fmax 150N | SKB12-2 | Black | 10/100 |
| SPW12SK-3/1.5M | 64100 14 522 98-8 | 1.5 | Suspension wire set, Fmax 150N | SKB12-3 | White | 10/100 |
| SPW12SK-3/3M | 64100 14 500 10-8 | 3 | Suspension wire set, Fmax 150N | SKB12-3 | White | 10/100 |
| SPW12SK-3/5M | 64100 14 500 11-5 | 5 | Suspension wire set, Fmax 150N | SKB12-3 | White | 10/100 |



GLOBAL Trac adapters

The GA 100 MULTI Adapter™, designed by Nordic Aluminium, represents the latest innovation in adapter technology. There are no delays in the phase selector switch in the transition from one phase to another. The phase selector switch at the side of the adapter makes the use comfortable. Because both ends of the adapter are fitted with a locking mechanism, it can be removed directly from the track without turning it.



Adapter for all lighting tracks

MULTI Adapters are also designed to work with other manufacturers' lighting tracks. This means that the light manufacturer or fitter does not have to worry about the track on which the light will be mounted. Nordic Aluminium's three-circuit adapters include a wide selection of MULTI Adapters. The adapters come in three standard colours: grey, white and black. Adapters include several patented solutions. The materials used are halogen free and flame resistant.



Most popular adapter in the world

Our GA 69 MULTI Adapter is the world's most sold adapter. Its quality and reliability are unequalled. Product testing and 100% quality assurance are an integral part of Nordic Aluminium's strategy.



For all power supply needs


Continuous product development is essential for Nordic Aluminium. New products include a Schuko adapter. With this product the lighting track can be used for other power supply needs than lighting. It is a useful solution for meeting electricity needs in stores and small industrial premises.



3-circuit adapters

Available colours: -1 grey (RAL 7040), -2 black (RAL 9005), -3 white (RAL 9010).

GA 100



GA 100 circuit-selector adapter

| Type | EAN code | | Colour | PCS/ Package |
|----------|-------------------|---------------|--------|-----------------|
| GA 100-1 | 64100 14 530 00-6 | MULTI Adapter | Grey | 10/100 |
| GA 100-2 | 64100 14 531 00-3 | MULTI Adapter | Black | 10/100 |
| GA 100-3 | 64100 14 532 00-0 | MULTI Adapter | White | 10/100 |

Truly modular adapter: end cover can be changed to allow for GAC version or trafo box installations.

MULTI Adapter™


- 10 A, 250 V, Safety class I
- Max. pull strength 100 N
- Max. torque 2.5 Nm
- To be used with stranded wire 0.5 ...1 mm²

Slot connection. The conductors are pressed into the connectors by the cable mounting tool GB 66CT.


| Type | EAN code | | Colour | PCS/ Package |
|-----------|----------|---------------|--------|-----------------|
| GA 100L-1 | | MULTI Adapter | Grey | 100/3200 |
| GA 100L-2 | | MULTI Adapter | Black | 100/3200 |
| GA 100L-3 | | MULTI Adapter | White | 100/3200 |

| | | | | |
|---------|-------------------|----------------------|--|----------|
| CG 100 | 64100 14 530 79-2 | Optional cable grip | | 100/5000 |
| GB 66CT | 64100 14 522 51-3 | Slot connection tool | | 1/50 |


CG 100



GB 66CT




GAC 600




| | | | | |
|----------|--------------------|-----------------------|-------|------|
| GAC600-1 | 64 100 14 532 92-5 | Pulse control adapter | Grey | 5/50 |
| GAC600-2 | 64 100 14 532 93-2 | Pulse control adapter | Black | 5/50 |
| GAC600-3 | 64 100 14 532 94-9 | Pulse control adapter | White | 5/50 |

GAC 600 LX




| | | | | |
|------------|--|---|-------|----|
| GAC600LX-1 | | Pulse control adapter, not preassembled | Grey | 50 |
| GAC600LX-2 | | Pulse control adapter, not preassembled | Black | 50 |
| GAC600LX-3 | | Pulse control adapter, not preassembled | White | 50 |

GAC 69



| | | | | |
|-----------|--|-----------------------|-------|------|
| GAC 69-1 | | Pulse control adapter | Grey | 1/50 |
| GAC 69-2 | | Pulse control adapter | Black | 1/50 |
| GAC 69-3 | | Pulse control adapter | White | 1/50 |
| GAC 69L-1 | | Pulse control adapter | Grey | 50 |
| GAC 69L-2 | | Pulse control adapter | Black | 50 |
| GAC 69L-3 | | Pulse control adapter | White | 50 |


GA 69




CG 69




GA 69CT




GAT 69



GAT 101



GAT 102



GA 69 circuit-selector adapter

| Type | EAN code | | Colour | PCS/ Package |
|---------|-------------------|---------------|--------|-----------------|
| GA 69-1 | 64100 14 530 74-7 | MULTI Adapter | Grey | 100/4800 |
| GA 69-2 | 64100 14 520 69-4 | MULTI Adapter | Black | 100/4800 |
| GA 69-3 | 64100 14 530 69-3 | MULTI Adapter | White | 100/4800 |

| | | | | |
|---------|-------------------|----------------------|--|----------|
| CG 69 | 64100 14 530 78-5 | Optional cable grip | | 100/5000 |
| GA 69CT | 64100 14 522 52-0 | Slot connection tool | | 1/100 |

MULTI Adapter™

- 6 A, 250 V, Safety class I
- Max. pull strength 50 N
- Max. torque 2.5 Nm
- To be used with stranded wire 0.5 ...1 mm²

Slot connection. The conductors are pressed into the connectors by the connector lid or by the cable mounting tool.

GAT 69 trafo housing adapter

| Type | EAN code | | Colour | PCS/ Package |
|----------|-------------------|--|--------|-----------------|
| GAT 69-1 | 64100 14 522 53-7 | | Grey | 50 |
| GAT 69-2 | 64100 14 522 54-4 | | Black | 50 |
| GAT 69-3 | 64100 14 522 55-1 | | White | 50 |

MULTI Adapter™

- 6 A, 250 V, Safety class II
- Max. pull strength 50 N
- Max. torque 2.5 Nm
- To be used with stranded wire 0.5....1 mm²
- Delivered without transformer
- To be used only with a grounded transformer

GAT 101 and GAT 102 Multi Device Adapter

| Type | EAN code | | Colour | PCS/ Package |
|-----------|----------|----------------------|--------|-----------------|
| GAT 101-1 | | MULTI Device Adapter | Grey | 1/25 |
| GAT 101-2 | | MULTI Device Adapter | Black | 1/25 |
| GAT 101-3 | | MULTI Device Adapter | White | 1/25 |

GA 100 adapter body included.


| | | | | |
|-----------|--|----------------------|-------|----|
| GAT 102-1 | | MULTI Device Adapter | Grey | 25 |
| GAT 102-2 | | MULTI Device Adapter | Black | 25 |
| GAT 102-3 | | MULTI Device Adapter | White | 25 |

Note! To be ordered separately: GA 100 or GAC 600 adapter.

3-circuit adapters


Available colours: –1 grey (RAL 7040), –2 black (RAL 9005), –3 white (RAL 9010).

GA 300

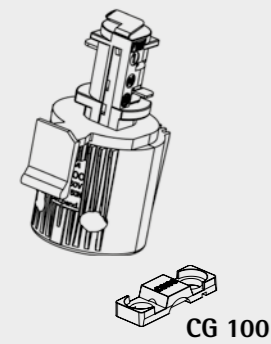


| GA 300 circuit selector adapter. Phase 2 preselected. | | | |
|---|-------------------|--------|-----------------|
| Type | EAN code | Colour | PCS/ Package |
| GA300–1 | 64100 14 530 43–3 | Grey | 10/100 |
| GA300–2 | 64100 14 530 44–0 | Black | 10/100 |
| GA300–3 | 64100 14 530 45–7 | White | 10/100 |
| GA300L–1 | 64100 14 530 46–4 | Grey | 100/4800 |
| GA300L–2 | 64100 14 530 47–1 | Black | 100/4800 |
| GA300L–3 | 64100 14 530 48–8 | White | 100/4800 |
| <div><div>– A discreet adapter for elegant housing solutions</div><div>– For GLOBAL Trac Pro XTS and XTSF tracs</div><div>– 3 A, 250 V, Safety class I</div><div>– Max pull strength 50 N</div><div>– Max torque 2.5 Nm</div><div>– To be used with stranded wire</div><div>– Cable Grip CG 100</div></div> | | | |
| Slot Connection. The conductors are pressed into the connectors by the Slot Plug (included) using for example a Torx 10 screwdriver. | | | |

GA 300PP

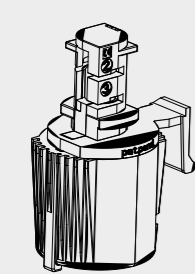


| GA 300PP adapter, plastic parts. | | |
|--|--------|-----------------|
| Type | Colour | PCS/ Package |
| GA300PP–1 | Grey | 100 |
| GA300PP–2 | Black | 100 |
| GA300PP–3 | White | 100 |
| <div><div>– For customized solutions</div><div>– No metal connectors</div><div>– For mechanical support only</div></div> | | |

GA 300B

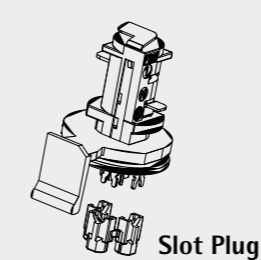

| GA 300B Adapter body | | |
|----------------------------|--------|-----------------|
| Type | Colour | PCS/ Package |
| GA300B–1 | Grey | 100 |
| GA300B–2 | Black | 100 |
| GA300B–3 | White | 100 |
| – For customized solutions | | |

GA 300NB

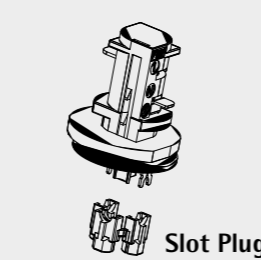


| GA 300NB Adapter body | | |
|---|--------|-----------------|
| Type | Colour | PCS/ Package |
| GA300NB–1 | Grey | 100 |
| GA300NB–2 | Black | 100 |
| GA300NB–3 | White | 100 |
| <div><div>– For class II customized solutions</div><div>– No ground connector</div><div>– Without locking lever</div></div> | | |

3-circuit adapters

Available colours: –1 grey (RAL 7040), –2 black (RAL 9005), –3 white (RAL 9010).

XTSA 68




| XTSA 68 circuit-selector adapter | | | | |
|----------------------------------|-------------------|---------------|--------|-------------|
| Type | EAN code | | Colour | PCS/Package |
| XTSA 68-1 | 64100 14 530 73-0 | MULTI Adapter | Grey | 10/100 |
| XTSA 68-2 | 64100 14 520 68-7 | MULTI Adapter | Black | 10/100 |
| XTSA 68-3 | 64100 14 530 68-6 | MULTI Adapter | White | 10/100 |
| XTSA 68L-1 | | MULTI Adapter | Grey | 100/3200 |
| XTSA 68L-2 | | MULTI Adapter | Black | 100/3200 |
| XTSA 68L-3 | | MULTI Adapter | White | 100/3200 |

CG 75




| | | | | |
|--|-------------------|---------------------|--|----------|
| CG 75 | 64100 14 530 77-8 | Optional cable grip | | 100/5000 |
| MULTI Adapter™ | | | | |
| – 10 A, 250 V, Safety class I | | | | |
| – Max. pull strength 100 N | | | | |
| – Max. torque 2.5 Nm | | | | |
| – Connecting conductors max. 3 x 1.5 mm2 | | | | |
| Screw-in connection. The conductors are connected with screws. | | | | |

XTSA 67



| XTSA 67 power take-off adapter | | | | |
|--------------------------------|-------------------|------------------------|--------|-------------|
| Type | EAN code | | Colour | PCS/Package |
| XTSA 67-1 | 64100 14 500 46-7 | Power take-off adapter | Grey | 10/100 |
| XTSA 67-2 | 64100 14 520 67-0 | Power take-off adapter | Black | 10/100 |
| XTSA 67-3 | 64100 14 530 67-9 | Power take-off adapter | White | 10/100 |

XTSA 67S




| | | | | |
|---|-------------------|----------------|-------|------|
| XTSA 67S-3 | 64100 14 500 44-3 | Schuko adapter | Black | 5/50 |
| XTSA 67S-3 | 64100 14 531 67-6 | Schuko adapter | White | 5/50 |
| – For GLOBAL Trac Pro tracks XTS and XTSF tracs | | | | |
| – 16 A, 250 V/400 V, Safety class I | | | | |
| – Max. pull strength 100 N | | | | |
| – Max. torque 2.5 Nm | | | | |
| – Connecting conductors max. 5 x 2.5 mm2 | | | | |

Nipples for 3-circuit adapters

Available colours: –1 grey (RAL 7040), –2 black (RAL 9005), –3 white (RAL 9010), –9 aluminium.

| Type | EAN code | Thread | H mm | Ø mm | Colour | Strain relief | Suitable for adapter | | | | | | | PCS/ Package |
|--------------------|-------------------|---------|---------|---------|-----------|------------------|----------------------|--------|--------|---------|--------|---------|---------|-----------------|
| | | | | | | | GA 69 | GAT 69 | GA 100 | GAC 600 | GA 300 | XTSA 68 | XTSA 67 | |
| | | | | | | | | | | | | | | |
| Fixed nipple | | | | | | | | | | | | | | |
| XTS 56/8.6-9 | 64100 14 522 56-8 | M13 x1 | 8.6 | 9.0 | Aluminium | XTSA 513 | x | x | x | x | x | x | x | 100/500 |
| XTS 58/8-9 | 64100 14 501 71-6 | M10 x 1 | 8.0 | 7.4 | Aluminium | XTSA 510 | x | x | x | x | x | x | x | 100/500 |
| GA 510-1 | 64100 14 500 34-4 | | | 7.0 | Grey | Included | x | x | x | x | x | x | x | 100/500 |
| GA 510-2 | 64100 14 520 86-1 | | | 7.0 | Black | Included | x | x | x | x | x | | x | 100/500 |
| GA 510-3 | 64100 14 530 86-0 | | | 7.0 | White | Included | x | x | x | x | x | x | x | 100/500 |
| | | | | | | | | | | | | | | |
| Rotating nipple *) | | | | | | | | | | | | | | |
| XTSA360/8-1 | 64100 14 500 18-4 | M10 x1 | 8.0 | 7.4 | Grey | XTSA 510 | x | x | x | x | x | x | x | 100/500 |
| XTSA360/8-2 | 64100 14 500 19-1 | M10 x1 | 8.0 | 7.4 | Black | XTSA 510 | x | x | x | x | x | x | x | 100/500 |
| XTSA360/8-3 | 64100 14 500 20-7 | M10 x1 | 8.0 | 7.4 | White | XTSA 510 | x | x | x | x | x | x | x | 100/500 |
| XTSA 360/12-1 | 64100 14 522 82-7 | M10 x 1 | 12.0 | 7.4 | Grey | | x | x | x | x | x | x | x | 100/500 |
| XTSA 360/12-2 | 64100 14 522 83-4 | M10 x 1 | 12.0 | 7.4 | Black | | x | x | x | x | x | x | x | 100/500 |
| XTSA 360/12-3 | 64100 14 522 84-1 | M10 x 1 | 12.0 | 7.4 | White | | x | x | x | x | x | x | x | 100/500 |
| XTSA 55/12-9 | 64100 14 501 55-6 | M13 x 1 | 12.0 | 9.0 | Aluminium | | x | x | x | x | x | x | x | 100/500 |
| XTSA 57/8-9 | 64100 14 501 59-4 | M10 x 1 | 8.0 | 7.4 | Aluminium | XTSA 510 | x | x | x | x | x | x | x | 100/500 |
| XTSA 57/8-9DD | 64100 14 522 58-2 | M10 x 1 | 8.0 | 6.9 | Aluminium | XTSA 510 | x | x | x | x | x | x | x | 100/500 |
| XTSA 57/12-9 | 64100 14 501 57-0 | M10 x 1 | 12.0 | 7.4 | Aluminium | | x | x | x | x | x | x | x | 100/500 |
| XTSA 57/12-2 | 64100 14 520 92-2 | M10 x 1 | 12.0 | 7.4 | Black | | x | x | x | x | x | x | x | 100/500 |
| XTSA 57/17-9 | 64100 14 500 37-5 | M10 x 1 | 17.0 | 7.4 | Aluminium | | x | x | x | x | x | x | x | 100/500 |
| XTSA 57T1/8-9 | 64100 14 500 38-2 | M10 x 1 | 8.0 | 7.4 | Aluminium | XTSA 510 | x | x | x | x | x | x | x | 100/500 |
| XTSA 57T2/8-9 | 64100 14 500 39-2 | M10 x 1 | 8.0 | 7.4 | Aluminium | XTSA 510 | x | x | x | x | x | x | x | 100/500 |
| XTSA 63-9 | 64100 14 522 59-9 | M10 x 1 | | | Aluminium | | x | x | x | x | x | x | x | 100/500 |
| | | | | | | | | | | | | | | |
| Nipple joint *) | | | | | | | | | | | | | | |
| GA 37-1 | 64100 14 500 15-3 | | | 7.6 | Grey | | x | x | x | x | x | x | x | 10/100 |
| GA 37-2 | 64100 14 500 16-0 | | | 7.6 | Black | | x | x | x | x | x | x | x | 10/100 |
| GA 37-3 | 64100 14 500 17-7 | | | 7.6 | White | | x | x | x | x | x | x | x | 10/100 |
| GA 37M13-1 | 64100 14 500 27-6 | M13 x 1 | 11 | 7.6 | Grey | XTSA513 | x | x | x | x | x | x | x | 10/100 |
| GA 37M13-2 | 64100 14 500 28-3 | M13 x 1 | 11 | 7.6 | Black | XTSA513 | x | x | x | x | x | x | x | 10/100 |
| GA 37M13-3 | 64100 14 500 29-0 | M13 x 1 | 11 | 7.6 | White | XTSA513 | x | x | x | x | x | x | x | 10/100 |
| | | | | | | | | | | | | | | |
| Strain relief *) | | | | | | | | | | | | | | |
| XTSA 510-1 | 64100 14 500 32-0 | M10 x 1 | 9.0 | 9.2 | Grey | | | | | | | | | 100/500 |
| XTSA 510-2 | 64100 14 520 90-8 | M10 x 1 | 9.0 | 9.2 | Black | | | | | | | | | 100/500 |
| XTSA 510-3 | 64100 14 530 90-7 | M10 x 1 | 9.0 | 9.2 | White | | | | | | | | | 100/500 |
| XTSA 513-1 | 64100 14 500 33-7 | M13 x 1 | 9.0 | 9.2 | Grey | | | | | | | | | 100/500 |
| XTSA 513-2 | 64100 14 520 91-5 | M13 x 1 | 9.0 | 9.2 | Black | | | | | | | | | 100/500 |
| XTSA 513-3 | 64100 14 530 91-4 | M13 x 1 | 9.0 | 9.2 | White | | | | | | | | | 100/500 |
| | | | | | | | | | | | | | | |
| Thread | | | | | | | | | | | | | | |
| GAM 10-9 | 64100 14 501 75-4 | M10 x 1 | | | | | | | | | | | | 100/500 |
| GAM 13-9 | 64100 14 501 76-1 | M13 x 1 | | | | | | | | | | | | 100/500 |


*) Halogen free, V0-self-extinguishing.

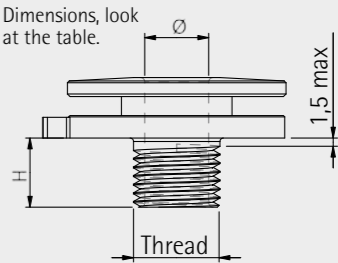

3-circuit adapter accessories

Available colours: –1 grey (RAL 7040), –2 black (RAL 9005), –3 white (RAL 9010).

GA 70

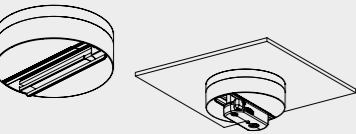


| FIX Point™ adapter connector | | | | | |
|---------------------------------|-----------|--------------------|-----------|-----------------|------|
| Type | EAN c ode | | Colour | PCS/ Package | |
| GA 70–1 | 64100 | 14 530 92–1 | FIX Point | Grey | 1/50 |
| GA 70–2 | 64100 | 14 520 93–9 | FIX Point | Black | 1/50 |
| GA 70–3 | 64100 | 14 530 93–8 | FIX Point | White | 1/50 |
| – For GLOBAL 3–circuit adapters | | | | | |
| – 10 A, 250 V, Safety class I | | | | | |
| – Max. pull strength 50 N | | | | | |
| – Max. torque 2.5 Nm | | | | | |
| – For surface installation | | | | | |

GA 30




| Type | EAN code | | Colour | PCS/ Package | |
|------------------------------|----------|-------------|-----------|-----------------|------|
| GA30–1 | 64100 | 14 500 12–2 | Fix Point | Grey | 1/50 |
| GA30–2 | 64100 | 14 500 13–9 | Fix Point | Black | 1/50 |
| GA30–3 | 64100 | 14 500 14–6 | Fix Point | White | 1/50 |
| – For GA300 adapter | | | | | |
| – 3 A, 250 V, Safety class I | | | | | |
| – Max. pull strength 50 N | | | | | |
| – Max. torque 2.5 Nm | | | | | |
| – For surface installation | | | | | |

XTSA 71

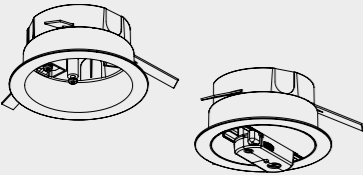


| Recessed box | | | | | |
|---|----------|---------------------|------------------------|--------|-----------------|
| Type | EAN code | | | Colour | PCS/ Package |
| XTSA 71–1 | 64100 | 14 530 97 –6 | FIX Point recessed box | Grey | 1/25 |
| XTSA 71–2 | 64100 | 14 520 96 –0 | FIX Point recessed box | Black | 1/25 |
| XTSA 71–3 | 64100 | 14 530 96 –9 | FIX Point recessed box | White | 1/25 |
| – For recessed installation with FIX Point™ GA 70 | | | | | |
| – Adjustable to different ceiling thicknesses, max. 30 mm | | | | | |
| – For fixing hole diameters of Ø 105–125 mm | | | | | |

XTSK 17




XTAO 16



| Clamps for fluorescent fitting to track | | | | |
|---|--------------------------|-------------|-----------|-----------------|
| Type | EAN code | | Colour | PCS/ Package |
| XTSK 17-1 | | Clamp 100 N | Grey | 10/100 |
| XTSK 17-2 | 64100 14 520 17-5 | Clamp 100 N | Black | 10/100 |
| XTSK 17-3 | 64100 14 530 17-4 | Clamp 100 N | White | 10/100 |
| | | | | |
| XTAO 16-1 | 64100 14 500 49-8 | Clamp 120 N | Aluminium | 5/50 |

GB 66



1-circuit adapters


Available colours: –1 grey (RAL 7040), –2 black (RAL 9005), –3 white (RAL 9010).

| GB 66 adapter | | | | | |
|---------------|----------|-------------|----------------------|-----------------|----------|
| Type | EAN code | | Colour | PCS/ Package | |
| GB 66-1 | 64100 | 14 509 65-1 | Adapter | Grey | 10/100 |
| GB 66-2 | 64100 | 14 508 66-1 | Adapter | Black | 10/100 |
| GB 66-3 | 64100 | 14 509 66-8 | Adapter | White | 10/100 |
| | | | | | |
| GB 66L-1 | | | Adapter | Grey | 100/9600 |
| GB 66L-2 | | | Adapter | Black | 100/9600 |
| GB 66L-3 | | | Adapter | White | 100/9600 |
| | | | | | |
| GB 66CT | 64100 | 14 522 51-3 | Slot connection tool | | 1/50 |


- 6 A, 250 V, Safety class I
- Max. pull strength 50 N
- Max. torque 2.5 Nm
- To be used with stranded wire 0.5 ... 1 mm²

Slot connection. The conductors are pressed into the connectors by the connector lid or by the cable mounting tool.


GB 67



GB 67M



GB 67S

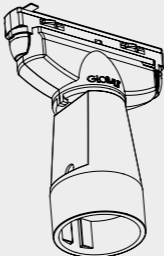

| GB 67 adapter | | | | | |
|---------------|----------|--------------------|----------------|-----------------|----------|
| Type | EAN code | | Colour | PCS/ Package | |
| GB 67-1 | 64100 | 14 509 73-6 | Adapter *) | Grey | 10/100 |
| GB 67-2 | 64100 | 14 508 67-8 | Adapter *) | Black | 10/100 |
| GB 67-3 | 64100 | 14 509 67-5 | Adapter *) | White | 10/100 |
| | | | | | |
| GB 67L-1 | | | Adapter | Grey | 100/4800 |
| GB 67L-2 | | | Adapter | Black | 100/4800 |
| GB 67L-3 | | | Adapter | White | 100/4800 |
| | | | | | |
| GB 67M-1 | | | Adapter | Grey | 100 |
| GB 67M-2 | | | Adapter | Black | 100 |
| GB 67M-3 | | | Adapter | White | 100 |
| | | | | | |
| GB 67S-2 | 64100 | 14 500 45-0 | Schuko adapter | White | 1/50 |
| GB 67S-3 | 64100 | 14 509 68-2 | Schuko adapter | White | 1/50 |

*) Cable grip CG 69 included


- 16 A, 250 V, Safety class
- Max. pull strength 100 N
- Max. torque 2.5 Nm
- Connecting conductors max. 3 x 2.5 mm²

Screw-in connection. The conductors are connected with screws.

1-circuit adapters

Available colours: -1 grey (RAL 7040), -2 black (RAL 9005), -3 white (RAL 9010).

GBB 67




| GBT 67 adapter | | | | |
|--|----------|-----------------------|--------|-----------------|
| Type | EAN code | | Colour | PCS/ Package |
| GBB 67-1 | | Adapter without trafo | Grey | 20/960 |
| GBB 67-2 | | Adapter without trafo | Black | 20/960 |
| GBB 67-3 | | Adapter without trafo | White | 20/960 |
| <div>- Max. pull strength 100 N</div> <div>- Max. torque 2.5 Nm</div> <div>- Connecting conductors max. 3 x 1.5 mm²</div> <div>- Suits for use with dimmable fittings</div> | | | | |

Nipples for 1-circuit adapters

Available colours: -1 grey (RAL 7040), -2 black (RAL 9005), -3 white (RAL 9010), -9 aluminium.


| | | | | | | | | | | Suitable for adapter | | | |
|------|---------------------------|-------------------|---------|---------|--------|------------------|----------|--|--|----------------------|-------|--------|-----------------|
| Type | EAN code | Thread | H mm | Ø mm | Colour | Strain relief | | | | GB 66 | GB 67 | GBB 67 | PCS/ Package |
| | Fixed nipple | | | | | | | | | | | | |
| | XTS 56/8.6-9 | 64100 14 522 56-8 | M13 x1 | 8.6 | 9.0 | Aluminium | XTSA 513 | | | | x | x | 100/500 |
| | XTS 58/8-9 | 64100 14 501 71-6 | M10 x 1 | 8.0 | 7.4 | Aluminium | XTSA 510 | | | | x | x | 100/500 |
| | GA 510-1 | 64100 14 500 34-4 | | | 7.0 | Grey | Included | | | | x | x | 100/500 |
| | GA 510-2 | 64100 14 520 86-1 | | | 7.0 | White | Included | | | | x | x | 100/500 |
| | GA 510-3 | 64100 14 530 86-0 | | | 7.0 | White | Included | | | | x | x | 100/500 |
| | GB 510-1 | 64100 14 500 35-1 | | | 7.0 | Grey | Included | | | x | | | 100/500 |
| | GB 510-2 | 64100 14 508 58-6 | | | 7.0 | Black | Included | | | x | | | 100/500 |
| | GB 510-3 | 64100 14 509 58-3 | | | 7.0 | White | Included | | | x | | | 100/500 |
| | Rotating nipple *) | | | | | | | | | | | | |
| | XTSA 360/8-1 | 64100 14 500 18-4 | M10 x1 | 8.0 | 7.4 | Grey | XTSA 510 | | | | x | x | 100/500 |
| | XTSA 360/8-2 | 64100 14 500 19-1 | M10 x1 | 8.0 | 7.4 | Black | XTSA 510 | | | | x | x | 100/500 |
| | XTSA 360/8-3 | 64100 14 500 20-7 | M10 x1 | 8.0 | 7.4 | White | XTSA 510 | | | | x | x | 100/500 |
| | XTSA 360/12-1 | 64100 14 522 82-7 | M10 x 1 | 12.0 | 7.4 | Grey | | | | | x | x | 100/500 |
| | XTSA 360/12-2 | 64100 14 522 83-4 | M10 x 1 | 12.0 | 7.4 | Black | | | | | x | x | 100/500 |
| | XTSA 360/12-3 | 64100 14 522 84-1 | M10 x 1 | 12.0 | 7.4 | White | | | | | x | x | 100/500 |
| | XTSA 55/12-9 | 64100 14 501 55-6 | M13 x 1 | 12.0 | 9.0 | Aluminium | | | | | x | x | 100/500 |
| | XTSA 57/8-9 | 64100 14 501 59-4 | M10 x 1 | 8.0 | 7.4 | Aluminium | XTSA 510 | | | | x | x | 100/500 |
| | XTSA 57/8-9DD | 64100 14 522 58-2 | M10 x 1 | 8.0 | 6.9 | Aluminium | XTSA 510 | | | | x | x | 100/500 |
| | XTSA 57/12-9 | 64100 14 501 57-0 | M10 x 1 | 12.0 | 7.4 | Aluminium | | | | | x | x | 100/500 |
| | XTSA 57/12-2 | 64100 14 520 92-2 | M10 x 1 | 12.0 | 7.4 | Black | | | | | x | x | 100/500 |
| | XTSA 57/17-9 | 64100 14 500 37-5 | M10 x 1 | 17.0 | 7.4 | Aluminium | | | | | x | x | 100/500 |
| | XTSA 57T/8-9 | 64100 14 500 38-2 | M10 x 1 | 8.0 | 7.4 | Aluminium | XTSA 510 | | | | x | x | 100/500 |
| | XTSA 57T/8-9 | 64100 14 500 39-2 | M10 x 1 | 8.0 | 7.4 | Aluminium | XTSA 510 | | | | x | x | 100/500 |
| | XTSA 63-9 | 64100 14 522 59-9 | M10 x 1 | | | Aluminium | | | | | x | x | 100/500 |
| | GA 57/10-1 | 64100 14 509 56-9 | M10 x 1 | 10.0 | 7.0 | Grey | XTSA 510 | | | x | | | 100/500 |
| | GA 57/10-2 | 64100 14 508 57-9 | M10 x 1 | 10.0 | 7.0 | Black | XTSA 510 | | | x | | | 100/500 |
| | GA 57/10-3 | 64100 14 509 57-6 | M10 x 1 | 10.0 | 7.0 | White | XTSA 510 | | | x | | | 100/500 |
| | GA 57/10-9 | 64100 14 508 97-5 | M10 x 1 | 10.0 | 7.0 | Aluminium | XTSA 510 | | | x | | | 100/500 |
| | GA 57/21-9 | | M10 x 1 | 21.0 | 7.0 | Aluminium | | | | x | | | 100/500 |
| | Nipple joint *) | | | | | | | | | | | | |
| | GA37-1 | 64100 14 500 15-3 | | | 7.6 | Grey | | | | | x | x | 10/100 |
| | GA37-2 | 64100 14 500 16-0 | | | 7.6 | Black | | | | | x | x | 10/100 |
| | GA37-3 | 64100 14 500 17-7 | | | 7.6 | White | | | | | x | x | 10/100 |
| | GA37M13-1 | 64100 14 500 27-6 | M13 x 1 | 11 | 7.6 | Grey | XTSA 513 | | | | x | x | 10/100 |
| | GA37M13-2 | 64100 14 500 28-3 | M13 x 1 | 11 | 7.6 | Black | XTSA 513 | | | | x | x | 10/100 |
| | GA37M13-3 | 64100 14 500 29-0 | M13 x 1 | 11 | 7.6 | White | XTSA 513 | | | | x | x | 10/100 |
| | Strain relief *) | | | | | | | | | | | | |
| | XTSA 510-1 | 64100 14 500 32-0 | M10 x 1 | 9.0 | 9.2 | Grey | | | | | | | 100/500 |
| | XTSA 510-2 | 64100 14 520 90-8 | M10 x 1 | 9.0 | 9.2 | Black | | | | | | | 100/500 |
| | XTSA 510-3 | 64100 14 530 90-7 | M10 x 1 | 9.0 | 9.2 | White | | | | | | | 100/500 |
| | XTSA 513-1 | 64100 14 500 33-7 | M13 x 1 | 9.0 | 9.2 | Grey | | | | | | | 100/500 |
| | XTSA 513-2 | 64100 14 520 91-5 | M13 x 1 | 9.0 | 9.2 | Black | | | | | | | 100/500 |
| | XTSA 513-3 | 64100 14 530 91-4 | M13 x 1 | 9.0 | 9.2 | White | | | | | | | 100/500 |
| | Thread | | | | | | | | | | | | |
| | GAM 10-9 | 64100 14 501 75-4 | M10 x 1 | | | | | | | | | | 100/500 |
| | GAM 13-9 | 64100 14 501 76-1 | M13 x 1 | | | | | | | | | | 100/500 |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |

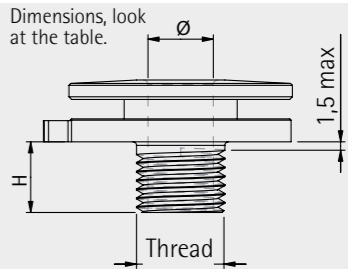


*) Halogen free, V0-self-extinguishing.

GLOBAL Trac connecting diagrams


GLOBAL Trac Pro

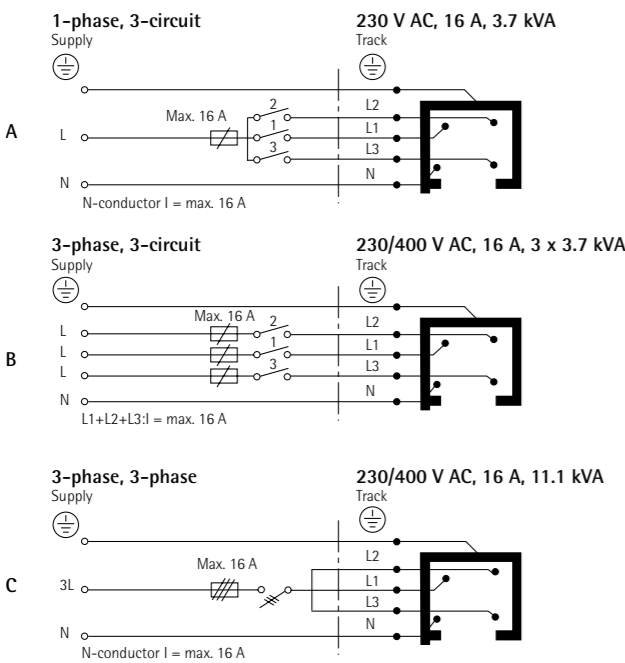

GLOBAL Trac Pulse control

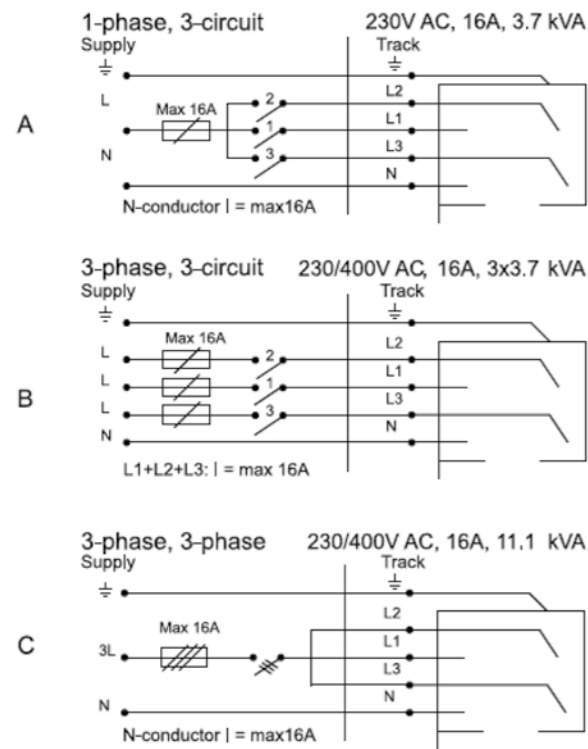

GLOBAL Trac Base

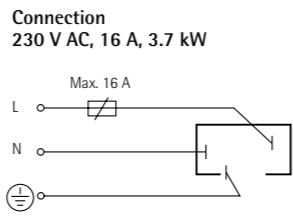

The market leader and pioneer lighting tracks

Nordic Aluminium designs, manufactures and markets lighting tracks and accessories related. The company has long history and expertise in aluminium production. The market leadership is the result of over 45 years of experience and determined investment in design and R&D.

Effective and precise customer service is the operational basis of Nordic Aluminium. Successful business lays its foundation on long-term partnerships in which close cooperation with clients is of key importance in each stage of the service chain. High quality standards and innovative utilization of the unique characteristics of aluminium are essential operational principles of Nordic Aluminium – be it the initial design of a product, production or refinement. That is why the company's motto is "Quality in Focus".

GLOBAL Trac is a registered trademark of Nordic Aluminium.
MULTI Adapter™ and FIX Point™ are trademarks of Nordic Aluminium.



The quality management system that Nordic Aluminium Plc use is approved by Bureau Veritas Certification and conforms with the ISO 9001:2008 standard.



The environment management system that Nordic Aluminium Plc use is approved by Bureau Veritas Certification and conforms with the ISO 14001:2004 standard.



Nordic Aluminium
P.O. Box 31, FI-04131 Sipoo, Finland
Visiting address: Kaapelitie 68, FI-02490 Pikkala, Finland
Tel. +358 20 7660 200, fax +358 20 7660 485, www.nordicaluminium.fi